



You are reading the Altair PBS Professional 19.2.3

## **Programmer 's Guide (PG)**

Updated 7/31/19

Copyright © 2003-2019 Altair Engineering, Inc. All rights reserved.

ALTAIR ENGINEERING INC. Proprietary and Confidential. Contains Trade Secret Information. Not for use or disclosure outside of Licensee's organization. The software and information contained herein may only be used internally and are provided on a non-exclusive, non-transferable basis. Licensee may not sublicense, sell, lend, assign, rent, distribute, publicly display or publicly perform the software or other information provided herein, nor is Licensee permitted to decompile, reverse engineer, or disassemble the software. Usage of the software and other information provided by Altair (or its resellers) is only as explicitly stated in the applicable end user license agreement between Altair and Licensee. In the absence of such agreement, the Altair standard end user license agreement terms shall govern.

Use of Altair's trademarks, including but not limited to "PBS™", "PBS Professional®", and "PBS Pro™", "PBS Works™", "PBS Control™", "PBS Access™", "PBS Analytics™", "PBScloud.io™", and Altair's logos is subject to Altair's trademark licensing policies. For additional information, please contact [Legal@altair.com](mailto:Legal@altair.com) and use the wording "PBS Trademarks" in the subject line.

For a copy of the end user license agreement(s), log in to <https://secure.altair.com/UserArea/agreement.html> or contact the Altair Legal Department. For information on the terms and conditions governing third party codes included in the Altair Software, please see the Release Notes.

This document is proprietary information of Altair Engineering, Inc.

## **Contact Us**

For the most recent information, go to the PBS Works website, [www.pbsworks.com](http://www.pbsworks.com), select "My PBS", and log in with your site ID and password.

### **Altair**

Altair Engineering, Inc., 1820 E. Big Beaver Road, Troy, MI 48083-2031 USA [www.pbsworks.com](http://www.pbsworks.com)

### **Sales**

[pbssales@altair.com](mailto:pbssales@altair.com) 248.614.2400

Please send any questions or suggestions for improvements to [agu@altair.com](mailto:agu@altair.com).

## Technical Support

Need technical support? We are available from 8am to 5pm local times:

Location	Telephone	e-mail
Australia	+1 800 174 396	anz-pbssupport@india.altair.com
China	+86 (0)21 6117 1666	pbs@altair.com.cn
France	+33 (0)1 4133 0992	pbssupport@europe.altair.com
Germany	+49 (0)7031 6208 22	pbssupport@europe.altair.com
India	+91 80 66 29 4500 +1 800 425 0234 (Toll Free)	pbs-support@india.altair.com
Italy	+39 800 905595	pbssupport@europe.altair.com
Japan	+81 3 6225 5821	pbs@altairjp.co.jp
Korea	+82 70 4050 9200	support@altair.co.kr
Malaysia	+91 80 66 29 4500 +1 800 425 0234 (Toll Free)	pbs-support@india.altair.com
North America	+1 248 614 2425	pbssupport@altair.com
Russia	+49 7031 6208 22	pbssupport@europe.altair.com
Scandinavia	+46 (0)46 460 2828	pbssupport@europe.altair.com
Singapore	+91 80 66 29 4500 +1 800 425 0234 (Toll Free)	pbs-support@india.altair.com
South Africa	+27 21 831 1500	pbssupport@europe.altair.com
South America	+55 11 3884 0414	br_support@altair.com
UK	+44 (0)1926 468 600	pbssupport@europe.altair.com



# Contents

Manual Pages	vii
About PBS Documentation	ix
<b>1 Introduction</b>	<b>1</b>
1.1 Location of API Libraries	1
1.2 Location of Header Files	1
1.3 Example Compilation Line	1
1.4 Deprecations	1
<b>2 PBS Architecture</b>	<b>3</b>
2.1 PBS Components	3
<b>3 Server Functions</b>	<b>9</b>
3.1 General Identifiers	9
3.2 Batch Server Functions	11
3.3 Server Management	11
3.4 Queue Management	12
3.5 Job Management	12
3.6 Server to Server Requests	17
3.7 Deferred Services	18
3.8 Resource Management	21
3.9 Network Protocol	22
<b>4 Batch Interface Library (IFL)</b>	<b>25</b>
4.1 Interface Library Overview	25
4.2 Interface Library Routines	26
<b>5 TM Library</b>	<b>69</b>
5.1 TM Library Routines	69
<b>6 RM Library</b>	<b>75</b>
6.1 RM Library Routines	75
<b>7 TCL/tk Interface</b>	<b>79</b>
7.1 TCL/tk API Functions	79
<b>8 Hooks</b>	<b>85</b>
8.1 Introduction	85
8.2 How Hooks Work	85
8.3 Interface to Hooks	86
<b>Index</b>	<b>95</b>

# Contents

---

# Manual Pages

openrm, closerm, downrm, configrm, addreq, allreq, getreq, flushreq, activereq, fullresp. . . . .	PG-76
pbs_alterjob . . . . .	PG-27
pbs_connect . . . . .	PG-28
pbs_default . . . . .	PG-29
pbs_deljob . . . . .	PG-30
pbs_delresv . . . . .	PG-31
pbs_disconnect . . . . .	PG-32
pbs_geterrmsg . . . . .	PG-33
pbs_holdjob . . . . .	PG-34
pbs_locjob . . . . .	PG-35
pbs_manager . . . . .	PG-36
pbs_modify_resv . . . . .	PG-38
pbs_module . . . . .	PG-87
pbs_movejob . . . . .	PG-39
pbs_msgjob . . . . .	PG-40
pbs_orderjob . . . . .	PG-41
pbs_relnodesjob . . . . .	PG-42
pbs_rerunjob . . . . .	PG-43
pbs_rlsjob . . . . .	PG-44
pbs_runjob, pbs_asyrunjob . . . . .	PG-45
pbs_selectjob . . . . .	PG-46
pbs_selstat . . . . .	PG-48
pbs_sigjob . . . . .	PG-50
pbs_statfree . . . . .	PG-51
pbs_stathook(3B) . . . . .	PG-93
pbs_statjob . . . . .	PG-52
pbs_statnode, pbs_statvnode, pbs_stathost . . . . .	PG-54
pbs_statque . . . . .	PG-56
pbs_statresv . . . . .	PG-58
pbs_statrsc . . . . .	PG-60
pbs_statsched . . . . .	PG-62
pbs_statserver . . . . .	PG-63
pbs_submit . . . . .	PG-65
pbs_submit_resv . . . . .	PG-67
pbs_tclapi . . . . .	PG-80

## Manual Pages

---

pbs_terminate .....	PG-68
tm_init, tm_nodeinfo, tm_poll, tm_notify, tm_spawn, tm_kill, tm_obit, tm_taskinfo, tm_atnode, tm_rescinfo, tm_publish, tm_subscribe, tm_finalize, tm_attach.....	PG-70



# About PBS Documentation

The PBS Professional guides and release notes apply to the *commercial* releases of PBS Professional.

## Document Conventions

### Abbreviation

The shortest acceptable abbreviation of a command or subcommand is underlined

### Attribute

Attributes, parameters, objects, variable names, resources, types

### Command

Commands such as `qmgr` and `scp`

### Definition

Terms being defined

### File name

File and path names

### Input

Command-line instructions

### **Method**

Method or member of a class

### Output

Output, example code, or file contents

### *Syntax*

Syntax, template, synopsis

### **Utility**

Name of utility, such as a program

### *Value*

Keywords, instances, states, values, labels

## Notation

**Optional arguments** are enclosed in square brackets. For example:

```
qstat [-E]
```

**Variables** are enclosed in angle brackets. A variable is something the user must fill in with the correct value. In the following example, the user replaces *vnode name* with the name of the vnode:

```
pbsnodes -v <vnode name>
```

## About PBS Documentation

---

**Optional variables** are enclosed in angle brackets inside square brackets. For example:

```
qstat [<job ID>]
```

**Literal terms** appear exactly as they should be used. For example, to get the version of the `qstat` command, type the following exactly:

```
qstat --version
```

## List of PBS Professional Documentation

### **PBS Professional Release Notes**

Supported platforms, what's new and/or unexpected in this release, deprecations and interface changes, open and closed bugs, late-breaking information. For administrators and job submitters.

### **PBS Professional Installation & Upgrade Guide:**

How to install and upgrade PBS Professional. For the administrator.

### **PBS Professional Administrator s Guide:**

How to configure and manage PBS Professional. For the PBS administrator.

### **PBS Professional Hooks Guide:**

How to write and use hooks for PBS Professional. For the PBS administrator.

### **PBS Professional Reference Guide:**

Covers PBS reference material.

### **PBS Professional User s Guide:**

How to submit, monitor, track, delete, and manipulate jobs. For the job submitter.

### **PBS Professional Programmer s Guide:**

Discusses the PBS application programming interface (API). For integrators.

### **PBS Professional Manual Pages:**

PBS commands, resources, attributes, APIs.

## Where to Keep the Documentation

To make cross-references work, put all of the PBS guides in the same directory.

## Ordering Software and Licenses

To purchase software packages or additional software licenses, contact your Altair sales representative at [pbssales@altair.com](mailto:pbssales@altair.com).

# Introduction

This book, the **Programmer's Guide** for PBS Professional, is provided to document the external application programming interfaces to the PBS Professional software.

## 1.1 Location of API Libraries

All of the libraries containing the PBS API are installed by default in `$PBS_EXEC/lib/`.

## 1.2 Location of Header Files

Header files used by customer-written code are found in `$PBS_EXEC/include`.

## 1.3 Example Compilation Line

An example of a compile command might look like the following:

```
cc mycode.c -I/usr/pbs/include -L/usr/pbs/lib -lpbs
```

## 1.4 Deprecations

The following are deprecated:

```
pbs_tclapi  
pbs_resquery
```



# PBS Architecture

PBS is a distributed workload management system which manages and monitors the computational workload on a set of one or more computers.

## 2.1 PBS Components

PBS consists of two major component types: system processes and user-level commands. You can install PBS on one or more machines.

### 2.1.1 Single Execution System

If PBS is to manage a single system, all components are installed on that same system. During installation (as discussed in the next chapter) be sure to select option 1 (all components) from the PBS Installation tool. The following illustration shows how communication works when PBS is on a single host in TPP mode. For more on TPP mode, see [Chapter 4, "Communication", on page 47](#).

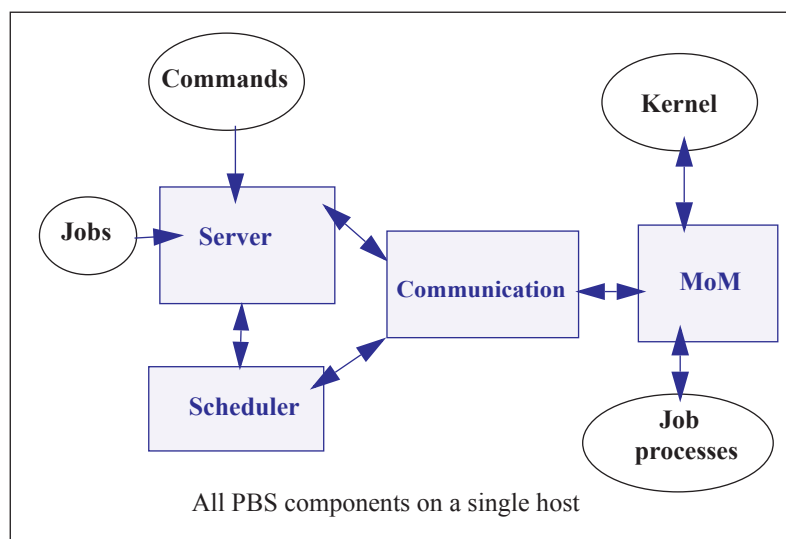


Figure 2-1: PBS daemons on a single execution host

## 2.1.2 Single Execution System with Front End

The PBS server and scheduler (`pbs_server` and `pbs_sched`) can run on one system and jobs can execute on another. The following illustration shows how communication works when the PBS server and scheduler are on a front-end system and MoM is on a separate host, in TPP mode. For more on TPP mode, see [Chapter 4, "Communication", on page 47](#).

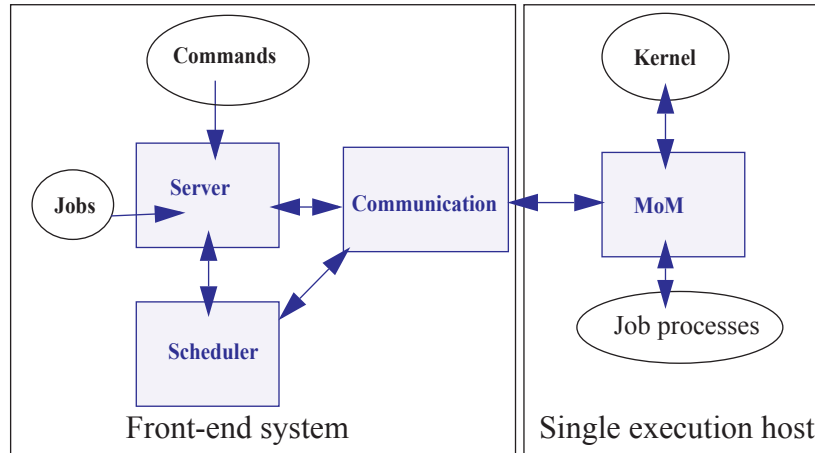


Figure 2-2: PBS daemons on single execution system with front end

### 2.1.3 Multiple Execution Systems

When you run PBS on several systems, normally the server (`pbs_server`), the scheduler (`pbs_sched`), and the communication daemon (`pbs_comm`) are installed on a “front end” system (option 1 from the PBS Installation tool), and a MoM (`pbs_mom`) is installed (option 2 from the Installation tool) and run on each execution host. The following diagram illustrates this for an eight-host complex in TPP mode.

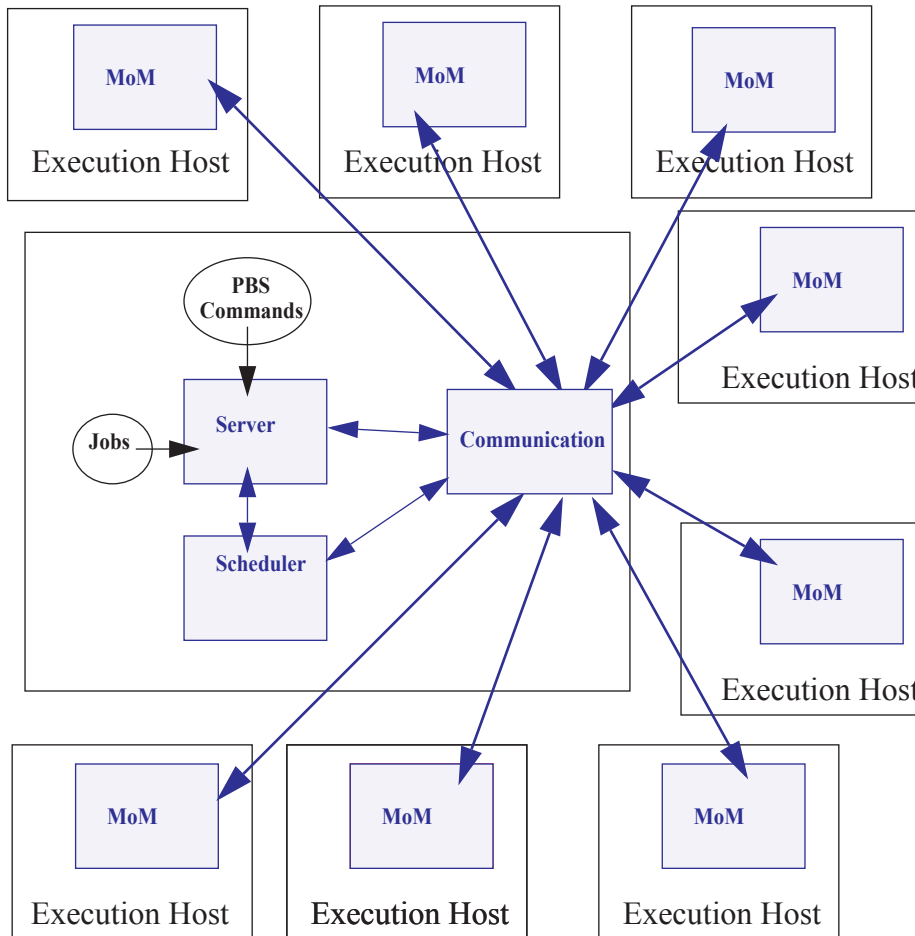


Figure 2-3: Typical PBS daemon locations for multiple execution hosts

### 2.1.4 Server

The *server* process is the central focus for PBS. Within this document, it is generally referred to as *the server* or by the execution name `pbs_server`. All commands and communication with the server are via an *Internet Protocol* (IP) network. The server’s main function is to provide the basic batch services such as receiving/creating a batch job, modifying the job, protecting the job against system crashes, and running the job. Typically there is one server managing a given set of resources.

The server contains a licensing client which communicates with the licensing server for licensing PBS jobs.

## 2.1.5 Job Executor (MoM)

The *Job Executor* is the component that actually places the job into execution. This process, *pbs\_mom*, is informally called *MoM* as it is the mother of all executing jobs. MoM places a job into execution when it receives a copy of the job from a server. MoM creates a new session that is as identical to a user login session as is possible. For example, if the user's login shell is `ssh`, then MoM creates a session in which `.login` is run as well as `.cshrc`. MoM also has the responsibility for returning the job's output to the user when directed to do so by the server. One MoM runs on each computer which will execute PBS jobs.

## 2.1.6 Scheduler

The *scheduler*, *pbs\_sched*, implements the site's policy controlling when each job is run and on which resources. The scheduler communicates with the various MoMs to query the state of system resources and with the server to learn about the availability of jobs to execute. See ["About Schedulers" on page 88 in the PBS Professional Administrator's Guide](#).

## 2.1.7 Communication Daemon

The *communication daemon*, *pbs\_comm*, handles communication between the other PBS daemons. For a complete description, see [section 4.5, "Inter-daemon Communication Using TPP", on page 51](#).

## 2.1.8 The pbs\_rshd Windows Service

The Windows version of PBS contains a service called *pbs\_rshd* for supporting remote file copy requests for delivering job output and error files to destination hosts.

The *pbs\_rshd* service supports `rcp`, but does not allow normal `rsh` activities. This service is used only by PBS; it is not intended to be used by administrators or users.

*pbs\_rshd* reads either the `%WINDIR%\system32\drivers\etc\hosts.equiv` file or the user's `.rhosts` file to determine the list of accounts that are allowed access to the local host during remote file copying.

PBS uses this same mechanism for determining whether a remote user is allowed to submit jobs to the local server.

*pbs\_rshd* is started automatically during installation; you can also start it manually.

To start *pbs\_rshd* as a service:

```
net start pbs_rshd
```

To start *pbs\_rshd* in debug mode, so that it prints logging output on the command line:

```
pbs_rshd -d
```

If `user1` on `hostA` causes a file to be copied to `hostB` (running *pbs\_rshd*) so that the source is `file1` and the destination is `hostB:file2`, *pbs\_rshd* authenticates `user1` as follows:

- If `user1` is a non-administrator account (e.g. not belonging to the Administrators group), then the copy will succeed in one of 2 ways:
  - `user1@hostA` is authenticated via `hostB's` `hosts.equiv` file; or
  - `user1@hostA` is authenticated via user's `[PROFILE_PATH]/.rhosts` on `hostB`.

See also [section 2.3.8, "Windows User HOMEDIR", on page 16](#).



---

One of the following must be configured:

- The system-wide `hosts.equiv` file on *hostB* includes as one of its entries:  
`hostA`
- or, `[PROFILE_PATH]\.rhosts` on *userA's* account on *hostB* includes:  
`hostA userA`
- If *userA* is an administrator account, or the source is `file1` and the target is `userB@hostB:file2` then use of the account's `[PROFILE_PATH]\.rhosts` file is the only way to authenticate, and it needs to have the entry:  
`hostA userA`

## 2.1.9 Commands

PBS supplies both command line programs that are POSIX 1003.2d conforming and a graphical interface. These are used to submit, monitor, modify, and delete jobs. These *client commands* can be installed on any system type supported by PBS and do not require the local presence of any of the other components of PBS.

There are three classifications of commands: user commands (which any authorized user can use), operator commands, and manager (or administrator) commands. Operator and Manager commands require specific access privileges.

PBS commands are described in [“PBS Commands” on page 19 of the PBS Professional Reference Guide](#).



# Server Functions

This chapter presents formal definitions for identifiers and names to be used throughout the remainder of this document, followed by detailed discussion of the various functions of the PBS Professional server process.

## 3.1 General Identifiers

The following identifiers or names are referenced throughout this document. Unless other-wise noted, their usage will conform to the definition and syntax described in the following subsections and to the general rules described in the next paragraph. If allowed as part of the identifier, when entering the identifier string on the command line or in a PBS job script directive, embedded single or double quote marks must be escaped by enclosing the string in the other type of quote mark. Therefore, the string may not contain both types of quote marks. If white space is allowed in the identifier string, the string must be quoted when it is entered on the command line or in a PBS job directive.

### 3.1.1 Account String

An Account String is a string of characters that some server implementations may use to provide addition accounting or charge information. The syntax is unspecified except that it must be a single string. When provided on the command line to a PBS utility or in a directive in a PBS job script, any embedded white space must be escaped by enclosing the string in quotes.

### 3.1.2 Attribute Name

An Attribute Name identifies an attribute or data item that is part of the information that makes up a job, queue, or server. The name must consist of alphanumeric characters plus the underscore, `'_'`, character. It should start with an alphanumeric character. The length is not limited. The names recognized by PBS are listed in sections 2.2, 2.3, and 2.4.

### 3.1.3 Destination Identifiers

A destination identifier is a string used to specify a particular destination. The identifier may be specified in one of three forms:

*queue@server\_name*

*queue*

*@server\_name*

where *queue* is an ASCII character string of up to 15 characters. Valid characters are alphanumerics, the hyphen and the underscore. The string must begin with a letter. Queue is the name of a queue at the batch server specified by *server\_name*. That server will interpret the *queue* string. If *queue* is omitted, a null string is assumed. *server\_name* is a string identifying a server; see *server\_name*, below. If *server\_name* is omitted, the default server is assumed.

### 3.1.4 Default Server

When a server is not specified to a client, the client will send batch requests to the server identified as the default server. A client identifies the default server by (a) the setting of the environment variable `PBS_DEFAULT` which contains a server name, or (b) by editing the `PBS_SERVER` variable in the `/etc/pbs.conf` file on the local host. Note that if both are present, `PBS_DEFAULT` overrides the `PBS_SERVER` specification.

### 3.1.5 Host Name

A Host Name is a string that identifies a host or system on the network. The syntax of the string must follow the rules established by the network. For IP, a host name is of the form `name.domain`, where `domain` is a hierarchical, dot-separated List of subdomains. Therefore, a host name cannot contain a dot, “.” as a legal character other than as a subdomain separator. The name must not contain the commercial at sign, “@”, as this is often used to separate a file from the host in a remote file name. Also, to prevent confusion with port numbers (see section 2.7.9) a host name cannot contain a colon, “:”. The maximum length of a host name supported by PBS is defined by `PBS_MAXHOSTNAME`, currently set to 64.

### 3.1.6 Job Identifiers

When the term job identifier is used, the identifier is specified as:

`sequence_number[.server_name][@server]` The `sequence_number` is the number supplied by the server when the job was submitted. The `server_name` component is the name of the server which created the job. If it is missing, the name of the default server will be assumed. `@server` specifies the current location of the job. When the term fully qualified job identifier is used, the identifier is specified as:

*sequence\_number.server[@server]*

The `@server` suffix is not required if the job is still resides at the original server which created the job. The `qsub` command will return a fully qualified job identifier.

### 3.1.7 Job Name

A Job Name is a string assigned by the user to provide a meaningful label to identify the job. The job name is up to and including 236 characters in length and may contain any printable characters other than white space. It must start with an alphanumeric character. If the user does not assign a name, PBS will assign a default name as described under the `-N` option of the `qsub(1)` command.

### 3.1.8 Resource Name

A Resource Name identifies a job resource requirement and may also identify a resource usage limit. The name must consist of alphanumeric characters plus the underscore, “\_”, character. It should start with an alphanumeric character. The length is not limited. Certain resource names are identified and reserved by POSIX 1003.2d and by PBS. They are listed below in section “Types of Resources”.

### 3.1.9 Server Name.

Server Name is an ASCII character string of the form: `basic_server_name[:port]` The string identifies a batch server. Basic server names are identical to host names. The network routine `gethostbyname` will be used to translate to a network address. The network routine `getservbyname` will be used to determine the port number. An alternate port number may be specified by appending a colon, “:”, and the port number to the host name. This provides the means of specifying an alternate (test) server on a host

---

### 3.1.10 User Name

A User Name is a string which identifies a user on the system under PBS. It is also known as the login name. PBS will accept names up to and including 16 characters. The name may contain any printable, non white space character excluding the commercial at sign, “@”. The various systems on which PBS is executing may place additional limitations on the user name.

## 3.2 Batch Server Functions

A batch server provides services in one of two ways, (1) the server provides a service at the request of a client; or (2) the server provides a deferred service as a result of a change in conditions monitored by the server. The server also performs a number of internal bookkeeping functions that are described in this major section.

### 3.2.1 Client Service Requests

By definition, clients are processes that make requests of a batch server. The requests may ask for an action to be performed on one or more jobs, one or more queues, or the server itself. Those requests that cannot be successfully completed, are rejected. The reason for the rejection is returned in the reply to the client.

### 3.2.2 Deferred Services

The server may, depending on conditions being monitored, defer a client service request until a later time. (Deferred services include file staging, job scheduling, etc.) Detailed discussion of the deferred services provided by the server is given in [section 3.7, “Deferred Services”, on page 18](#) below.

## 3.3 Server Management

The following sections describe the services provided by a batch server in response to a request from a client. The requests are grouped in the following subsections by the type of object affected by the request: server, queue, job, or resource. The batch requests described in this section control the functioning of the batch server. The control is either direct as in the Shut Down request, or indirect as when server attributes are modified. For a list of batch request codes, see [“Request Codes” on page 383 of the PBS Professional Reference Guide](#).

### 3.3.1 Manage Request

The Manage request supports the `qmgr (8)` command and several of the operator commands. The command directs the server to create, alter, or delete an object managed by the server or one of its attributes. For more information, see the `qmgr` command.

### 3.3.2 Server Status Request

The status of the server may be requested with a server Status request. The batch server will reject the request if the user of the client is not authorized to query the status of the server. If the request is accepted, the server will return a server Status Reply. See the `qstat` command and the Data Exchange Format description for details of which server attributes are returned to the client.

### 3.3.3 Start Up

A batch request to start a server cannot be sent to a server since the server is not running. Therefore a batch server must be started by a process local to the host on which the server is to run. The server is started by a `pbs_server` command. The server recovers the state of managed objects, such as queues and jobs, from the information last recorded by the server. The treatment of jobs which were in the running state when the server previously shut down is dictated by the start up mode, see the description of the `pbs_server(8)` command.

### 3.3.4 Shut Down

The batch server is "shut down" when it no longer responds to requests from clients and does not perform deferred services. The batch server is requested to shut down by sending it a server Shutdown request. The server will reject the request from a client not authorized to shut down the server. When the server accepts a shut down request, it will terminate in the manner described under the `qterm` command. When shutting down, the server must record the state of all managed objects (jobs, queues, etc.) in non-volatile memory. Jobs which were running will be marked in the secondary state field for possible special treatment when the server is restarted. If checkpoint is supported, any job running at the time of the shut down request whose Checkpoint attribute is not `n`, will be checkpointed. This includes jobs whose Checkpoint attribute value is "unspecified", a value of `u`. If the server receives either a `SIGTERM` or a `SIGSHUTDN` signal, the server will act as if it had received a shut down immediate request.

## 3.4 Queue Management

The following client requests affect one or more queues managed by the server. These requests require a privilege level generally assigned to operators and administrators.

### 3.4.1 Queue Status Request

The status of a queue at the server may be requested with a Queue Status request. The batch server will reject the request if any of the following conditions are true:

- The user of the client is not authorized to query the status of the designated queue.
- The designated queue does not exist on the server.

If the request does not specify a queue, status of all the queues at the server will be returned. When the request is accepted, the server will return a Queue Status Reply. See the `qstat` command and the Data Exchange Format description for details of which queue attributes are returned to the client.

## 3.5 Job Management

The following client requests affect one or more jobs managed by the server. These requests do not require any special privilege except when the job for which the request is issued is not owned by the user making the request.

### 3.5.1 Queue Job Request

A Queue Job request is a complex request consisting of several subrequests: Initiate Job Transfer, Job Data, Job Script, and Commit. The end result of a successful Queue Job request is an additional job being managed by the server. The job may have been created by the request or it may have been moved from another server. The job resides in a queue managed by the server. When a queue is not specified in the request, the job is placed in a queue selected by the server. This queue is known as the default queue. The default queue is an attribute of the server that is settable by the administrator. The queue, whether specified or defaulted, is called the target queue. The batch server will reject a Queue Job Request if any of the following conditions are true:

- The client is not authorized to create a job in the target queue.
- The target queue does not exist at the server.
- The target queue is not enabled.
- The target queue is an execution queue and a resource requirement of the job exceeds the limits set upon the queue.
- The target queue is an execution queue and an unrecognized resource is requested by the job.
- The job requires access to a user identifier that the client is not authorized to access.

When a job is placed in a execution queue, it is placed in the queued state unless one of the following conditions applies:

- The job has an `execution_time` attribute that specifies a time in the future and the `Hold_Types` attribute has value of `{NONE}`; in which case the job is placed in the waiting state.
- The job has a `Hold_Types` attribute with a value other than `{NONE}`, wherein the job is placed in the held state.

When a job is placed in a routing queue, its state may change based on the conditions described in [section 3.7.4, “Job Routing”, on page 20](#).

A server that accepts a Queue Job Request for a new job will: (1) add the `PBS_O_QUEUE` variable to the `Variable_List` attribute of the job and set the value to the name of the target queue; (2) add the `PBS_JOBID` variable to the `Variable_List` attribute of the job and set the value to the job identifier assigned to the job; (3) add the `PBS_JOBNAME` variable to the `Variable_List` attribute of the job and set the value to the value of the `Job_Name` attribute of the job. When the server accepts a Queue Job request for an existing job, the server will send a Track Job request to the server which created the job.

### 3.5.2 Job Credential Request

The Job Credential sub-request is part of the Queue Job complex request. This sub-request transfers a copy of the credential provided by the authentication facility explained below.

### 3.5.3 Job Script Request

The Job Script sub-request is part of the Queue Job complex request. This sub-request passes a block of the job script file to the receiving server. The script is broken into 8 kilobyte blocks to prevent having to hold the entire script in memory. One or more Job Script sub-requests may be required to transfer the script file.

### 3.5.4 Commit Request

The Commit sub-request is part of the Queue Job request. The Commit notifies the receiving server that all parts of the job have been transferred and the receiving server should now assume ownership of the job. Prior to sending the Commit, the sending client, command or another server, is the owner.

### 3.5.5 Message Job Request

A batch server can be requested to write a string of characters to one or both output streams of an executing job. This request is primarily used by an operator to record a message for the user. The batch server will reject a Message Job request if any of the following conditions are true:

- The designated job is not in the running state.
- The user of the client is not authorized to post a message to the designated job.
- The designated job is not owned by the server.

When the server accepts the Message Job request, it will forward the request to the primary MoM daemon for the job. (Upon receipt of the Message Job request from the server, the MoM will append the message string, followed by a new line character, to the file or files indicated. If no file is indicated, the message will be written to the standard error of the job.)

### 3.5.6 Locate Job Request

A client may ask a server to respond with the location of a job that was created or is owned by the server. When the server accepts the Locate Job request, it returns a Locate Reply. The request will be rejected if any of the following conditions are true:

- The server does not own (manage) the job, and
- The server did not create the job.
- The server is not maintaining a record of the current location of the job.

### 3.5.7 Delete Job Request

A Delete Job request asks a server to remove a job from the queue in which it exists and not place it elsewhere. The batch server will reject a Delete Job Request if any of the following conditions are true:

- The user of the client is not authorized to delete the designated job.
- The designated job is not owned by the server.
- The designated job is not in an eligible state. Eligible states are queued, held, waiting, running, and transiting.

If the job is in the running state, the server will forward the Delete Job request to the primary MoM daemon responsible for the job. (Upon receipt, the MoM daemon will first send a SIGTERM signal to the job process group. After a delay specified by the delete request or if not specified, the `kill_delay` queue attribute, the MoM will send a SIGKILL signal to the job process group. The job is then placed into the exiting state.) Option arguments exist to specify the “delay” time (seconds) between the SIGTERM and SIGKILL signals, as well as to “force” the deletion of the job even if the node on it is running is not responding.

### 3.5.8 Modify Job Request

A batch client makes a Modify Job request to the server to alter the attributes of a job. The batch server will reject a Modify Job Request if any of the following conditions are true:

- The user of the client is not authorized to make the requested modification to the job.
- The designated job is not owned by the server.
- The requested modification is inconsistent with the state of the job.
- A requested resource change would exceed the limits of the queue or server.
- An unrecognized resource is requested for a job in an execution queue.



---

When the batch server accepts a Modify Job Request, it will modify all the specified attributes of the job. When the batch server rejects a Modify Job Request, it will modify none of the attributes of the job.

## 3.5.9 Run Job

The "Run Job" request directs the server to place the specified job into immediate execution. The request is issued by a `qrun` operator command and by the PBS job scheduler.

### 3.5.9.1 Rerun Job Request

To rerun a job is to kill the members of the session (process) group of the job and leave the job in the execution queue. If the `Hold_Types` attribute is not `{NONE}`, the job is eligible to be re-scheduled for execution. The server will reject the Rerun Job request if any of the following conditions are true:

- The user of the client is not authorized to rerun the designated job.
- The Rerunnable attribute of the job has the value `{FALSE}`.
- The job is not in the running state.
- The server does not own the job.

When the server accepts the Rerun Job request, the request will be forwarded to the primary MoM responsible for the job, who will then perform the following actions:

- Send a SIGKILL signal to the session (process) group of the job.
- Send an OBIT notice to the server with resource usage information
- The server will then requeue the job in the execution queue in which it was executing.

If the `Hold_Types` attribute is not `{NONE}`, the job will be placed in the held state. If the `execution_time` attribute is a future time, the job will be placed in the waiting state. Otherwise, the job is placed in the queued state.

## 3.5.10 Hold Job Request

A client can request that one or more holds be applied to a job. The batch server will reject a Hold Job request if any of the following conditions are true:

- The user of the client is not authorized to add any of the specified holds.
- The batch server does not manage the specified job.

When the server accepts the Hold Job Request, it will add each type of hold listed which is not already present to the value of the `Hold_Types` attribute of the job. If the job is in the queued or waiting state, it is placed in the held state. If the job is in running state, then the following additional actions are taken: If check-point / restart is supported by the host system, placing a hold on a running job will cause the job (1) to be checkpointed, (2) the resources assigned to the job will be released, and (3) the job is placed in the held state in the execution queue. If checkpoint / restart is not supported, the server will only set the requested hold attribute. This will have no effect unless the job is rerun or restarted.

## 3.5.11 Release Job Request

A client can request that one or more holds be removed from a job. A batch server rejects a Release Job request if any of the following conditions are true:

- The user of the client is not authorized to add (remove) any of the specified holds.
- The batch server does not manage the specified job.

When the server accepts the Release Job Request, it will remove each type of hold listed from the value of the `Hold_Types` attribute of the job. Normally, the job will then be placed in the queued state, unless another hold type is remaining on the job. However, if the job is in the held state and all holds have been removed, the job is placed in the waiting state if the `Execution_Time` attribute specifies a time in the future.

### 3.5.12 Move Job Request

A client can request a server to move a job to a new destination. The batch server will reject a Move Job Request if any of the following conditions are true:

- The user of the client is not authorized to remove the designated job from the queue in which the job resides.
- The user of the client is not authorized to submit a job to the new destination.
- The designated job is not owned by the server.
- The designated job is not in the queued, held, or waiting state.
- The new destination is disabled.
- The new destination is inaccessible. When the server accepts a Move Job request, it will
  - Queue the designated job at the new destination.
  - Remove the job from the current queue.

If the destination exists at a different server, the current server will transfer the job to the new server by sending a Queue Job request sequence to the target server. The server will insure that a job is neither lost nor duplicated.

### 3.5.13 Select Jobs Request

A client is able to request from the server a list of jobs owned by that server that match a list of selection criteria. The request is a Select Jobs request. All the jobs owned by the server and which the user is authorized to query are initially eligible for selection. Job attributes and resources relationships listed in the request restrict the selection of jobs. Only jobs which have attributes and resources that meet the specified relations will be selected. The server will reject the request if the queue portion of a specified destination does not exist on the server. When the request is accepted, the server will return a Select Reply containing a list of zero or more jobs that met the selection criteria.

### 3.5.14 Signal Job Request

A batch client is able to request that the server signal the session (process) group of a job. Such a request is called a Signal Job request. The batch server will reject a Signal Job Request if any of the following conditions are true:

- The user of the client is not authorized to signal the job.
- The job is not in the running state, except for the special signal “resume” when the job must be in the Suspended state.
- The server does not own the designated job.
- The requested signal is not supported by the host operating system. (The kill system call returns [ `EINVAL` ].)

When the server accepts a request to signal a job, it will forward the request to the primary MoM daemon responsible for the job, who will then send the signal requested by the client to the all processes in the job’s session.

### 3.5.15 Status Job Request

The status of a job or set of jobs at a destination may be requested with a Status Job request. The batch server will reject a Status Job Request if any of the following conditions are true:

- The user of the client is not authorized to query the status of the designated job.
- The designated job is not owned by the server.

When the server accepts the request, it will return a Job Status Message to the client. See the `qstat` command and the Data Exchange Format description for details of which job attributes are returned to the client. If the request specifies a job identifier, status will be returned only for that job. If the request specifies a destination identifier, status will be returned for all jobs residing within the specified queue that the user is authorized to query.

## 3.6 Server to Server Requests

Server to server requests are a special category of client requests. They are only issued to a server by another server.

### 3.6.1 Track Job Request

A client that wishes to request an action be performed on a job must send a batch request to the server that currently manages the job. As jobs are routed or moved through the batch network, finding the location of the job can be difficult without a tracking service. The Track Job request forms the basis for this service. A server that queues a job sends a track job request to the server which created the job. Additional backup location servers may be defined. A server that receives a track job request records the information contained therein. This information is made available in response to a Locate Job request.

### 3.6.2 Synchronize Job Starts

PBS provides for synchronizing the initiation of separate jobs. This is done to support distributing processing. Job start synchronization is requested through a special dependency attribute. The first job in the set, the “master”, specifies the dependency attribute as:

```
-W synccount=count
```

where `count` is an integer which is the number of other jobs to be synchronized with this job. This job is the master only in the sense that it defines the rendezvous point for the semaphore messages and that it must be submitted first so the identifier is known for the other jobs in the set. The other jobs in the sync set specify the dependency attribute as:

```
-W syncwith=job_identifier
```

where `job_identifier` is the job identifier assigned to the job which contained the sync-count resource, the master job. When the server queues a job in an execution queue and the job is a member of a sync set, including the “master”, the server places a system hold on the job. The secondary state is set to indicate the system hold is for sync. The server managing the non master jobs will register the job with the server managing the master by sending a Register Dependent request with a "Register" operation. When all jobs have registered, as determined by the count on the master, the server managing the master job will send a Register Dependent request, with a "Release" operation, request to each job in turn in the set to remove the system hold. The released jobs may now vie for resources. The jobs are released in order of the “cheapest” resources first; the concept of “Resource Costs” will be explained shortly. When the resources required by a released job are available, as determined by the scheduler, A run Job Request will be issued for that job. The server which manages the job will send a Register Dependent request with a “Ready” operation to the server that owns the master job. This request indicates that the dependent job is ready and the job with the next cheapest resources can be released.

If the master of a sync set is aborted before all jobs in the set begin execution, an Abort Job request is sent to all jobs in the set. This is done because the synchronous feature is intended for a set jobs which need communication amongst themselves during execution. If the master is gone, (1) the rendezvous point for server messages is lost, and (2) the job set is unlikely to be able to establish the inter job communications required.

### 3.6.3 Job Dependency

PBS provides support for job dependency. A job, the “child”, can be declared to be dependent on one or more jobs, the “parents”. A parent may have any number of children. The dependency is specified as an attribute on the `qsub` command with the `-W` option. The general specification is of the form:

```
-W type=argument[,type=argument,...]
```

See the `qalter(1B)` or `qsub(1B)` man pages for the complete specification of the dependency list, and the *PBS Professional User's Guide* for detailed discussion of use.

When a server queues a job with a dependency type of `syncwith`, `after`, `afterok`, `afternotok`, or `after-any` in an execution queue, the server will send a Register Dependent Job request to the server managing the job specified by the associated `job_identifier`. The request will specify that the server is to register the dependency. This actually creates a corresponding `before` type dependency attribute entry on the parent (e.g. run job X *before* job Y). If the request is rejected because the parent job does not exist, the child job is aborted. If the request is accepted, a system hold is placed on the child job. When a parent job, with any of the `before...` types of dependency, reaches the required state, started or terminated, the server executing the parent job sends a Register Dependent Job request to the server managing the child job directing it to release the child job. If there are no other dependencies on other jobs, the system hold on the child job is removed. When a child job is submitted with an `on` dependency and the parent is submitted with any of the `before...` types of dependencies, the parent will register with the child. This causes the `on` dependency count to be reduced and a corresponding `after...` dependency to be created for the child job. The result is a pairing between corresponding `before...` and `after...` dependency types. If the parent job terminates in a manner that the child is not released, it is up to the user to correct the situation by either deleting the child job or by correcting the problem with the parent job and resubmitting it. If the parent job is resubmitted, it must have a dependency type of `before`, `beforeok`, `beforenotok`, or `beforeany` specified to connect it to the waiting child job.

## 3.7 Deferred Services

This section describes the deferred services performed by batch servers: file staging, job selection, job initiation, job routing, job exit, job abort, and the rerunning of jobs after a restart of the server. The following rules apply to deferred services on behalf of jobs:

- If the server cannot complete a deferred service for a reason which is permanent, then the job is aborted.
- If the service cannot be completed at the current time but may be later, the service is retried a finite number of times.

### 3.7.1 Job Scheduling

If the server attribute `scheduling` is set true, the server will immediately request a scheduling cycle of the PBS job scheduler. While it remains true, the scheduler will be cycled when any of four events occur:

- Enqueuing of a job in an execution queue or the change of state of a job in an execution queue to Queued from Waiting or Held.
- Termination of a running job. The termination may be normal execution completion, or because the job was deleted by request.
- Elapse of a specified cycle time as established by the administrator.
- The completion of a scheduling cycle in which one and only one job was scheduled for execution. This provides for the implementation of scheduling scripts that must see the impact of the new job on system resources before picking a second job.

While a request for a scheduling cycle is outstanding, the connection to the scheduler is open, the server will not make another request of the scheduler. If the server attribute `scheduling` is set false, the server will not contact the scheduler. This condition is indicated by the `server_state` attribute as Idle.

### 3.7.2 File Staging

Two types of file staging services exist, in-staging before execution and out-staging after execution. These services are requested by an attribute (via the `-W` option) which specifies the files to be staged:

```
-Wstagein=local_file@host:remote_path [,local_file@host:remote_path,...]
-Wstageout=local_file@host:remote_path [,local_file@host:remote_path,...]
```

A request to stage in a file directs the server to direct MoM to copy a file from a remote host to the local host. The user must have authority to access the file under the same user name under which the job will be run. The remote file is not modified or destroyed. The file will be available before the job is initiated. If a file cannot be staged in for any reason, any files which were staged-in are deleted and the job is placed into wait state and mail is sent to the job owner.

A request to stage out a file directs the server to direct MoM to move a file from the local host to a remote host. This service is performed after the job has completed execution and regardless of its exit status. If a file cannot be moved, mail is sent to the job owner. If a file is successfully staged out, the local file is deleted. A version of the BSD 4.4-Lite system utility, `rcp(1)`, will be used to move files over the network. This version of `rcp` has been modified to always return a non-zero exit status on any failure.

### 3.7.3 Job Initiation

Job initiation is to place a job into execution. The server may receive a Run Job request from the `qrun` command, or the PBS job scheduler. If the request is authenticated, then the server forwards the Run Job request to the appropriate MoM (as either specified in the Run Job request, or as selected by the server itself if unspecified).

The receiving MoM daemon will then create a session leader that runs the shell program indicated by the `Shell_Path_List` attribute of the job. The pathname of the script and any script arguments are passed as parameters to the shell. If the path name of the shell is a relative name, the MoM will search its execution path, `$PATH`, for the shell. If the path name of the shell is omitted or is the null string, the MoM uses the login shell for the user under whose name the job is to be run. The MoM will determine the user name under which the job is to be run by the following rules:

1. Select the user identifier from the `User_List` job attribute which has a host name that matches the execution host.
2. Select the user identifier from the `User_List` job attribute which has no associated host name.
3. Use the user name from the `job_owner` attribute of the job.

The MoM will create, in the environment of the session leader of the job, the environment variables named: `PBS_ENVIRONMENT`, the value of which is the string "PBS\_BATCH". `PBS_QUEUE` has the value of the name of the execution queue. The MoM will also place in the environment of the session leader of the job, all of the variables and their corresponding values found in the variables attribute of the job. The MoM will place the required limits on the resources for which the host system supports resource limits. If the job had been run before and is now being rerun, the MoM will insure that the standard output and standard error streams of the job are appended to the prior streams, if any. If the MoM and host system support accounting, the MoM will use the value of the `Account_Name` job attribute as required by the host system. If the MoM and host system support checkpoint, the MoM will set up checkpointing of the job according to the value of the `Checkpoint` job attribute. If checkpoint is supported and the `Checkpoint` attribute requests checkpointing at the minimum interval or a interval less than the minimum interval for the queue, then checkpoint will be set for an interval given by the queue attribute `minimum_interval`. The MoM will set up the standard output stream and the standard error stream of the job according to the following rules:

- The stream will be located in a temporary file in the MoM's `spool` directory.
- If the job attribute `Join_Path` has the value `eo` or the value `oe`, the MoM connects the standard error stream of the job to the same file as the standard output stream.

### 3.7.4 Job Routing

Job routing is moving a job from a routing queue to one of the destinations associated with the queue. If the `started` queue attribute is `{TRUE}`, the server will route all eligible jobs which reside in the queue. All jobs in the `queued` state are eligible. If the queue attribute `route_held_jobs` is `{TRUE}`, jobs in the `held` state are eligible for routing. If the queue attribute `route_waiting_jobs` is `{TRUE}`, jobs in the `waiting` state are eligible. The server will execute the function specified by the queue attribute `route_function` to select a destination for the job. Possible destinations are listed in the queue attribute `route_destinations`. If the destination to which the job is to be routed is at another server, the current server will use a `Queue Job` request sequence to move the job to the new destination. If the server is unable to route a job to a chosen destination, the server will select another destination from the list and retry the route. If the server is unable to route a job to any destination because of a temporary condition, such as being unable to connect with the server at the destination, the server will retry the route after a delay specified by the queue attribute `route_retry_time`. The server will proceed to route other jobs in the queue. The server will retry the route up to the (queue attribute) `number_retries` times. If the server is unable to route a job to any destination and all failures are permanent (non-temporary), the server will abort the job.

### 3.7.5 Job Exit

When the session leader of a batch job exits, the MoM will perform the following actions in the order listed.

- Place the job in the exiting state.
- Return the standard output and standard error streams of the job to the user. If the `Keep_Files` attribute of the job contains `{KEEP_OUTPUT}`, the server copies the spooled file holding the standard output stream of the job to the home directory of the user under whose name the job executed. The file name for the output is `job_name.oseq_number`. See the `qsub(1B)` command description. If the `Keep_Files` attribute of the job contains `{KEEP_ERROR}` and the `Join_Path` attribute does not contain 'e', the server copies the spooled file holding the standard error stream of the job to the home directory of the user under whose name the job executed. The file name for the error file is `job_name.eseq_number`.

---

If the files are not to be kept on the execution host as described above, the temporary file holding the standard output is copied or renamed to the host and path name specified by the job attribute `Output_Path`. If the path name is relative, the file will be located relative to home directory of the user on the receiving host.

- If the `Join_Path` attribute does not contain the value `e`, the standard error of the job is delivered according to the same rules as the standard output described above. If either output file cannot be copied to its specified destination, the server will send mail to the job owner specifying the current location of the output.
- If the `Mail_Points` job attribute contains the value `{EXIT}`, the server will send mail to the users listed in the job attribute `Mail_Users`.
- If out staging of files is supported, the files listed in the outfile resource will be copied to the specified destination.
- “Free” the resources allocated to the job. The actual releasing of resources assigned to the processes of the job is performed by the kernel. PBS will free the resources which it “reserved” for the job by decrementing the `resources_used` generic data item for the queue and server.
- The job will be removed from the execution queue.

### 3.7.6 Job Aborts

If the server aborts a job and the `Mail_Points` job attribute contains the value `{ABORT}`, the server will send mail to the users listed in the job attribute `Mail_Users`. The mail message will contain the reason the job was aborted. In addition, the `stdout` and `stderr` files specified for the job, if they exist, will be copied back to the specified location.

### 3.7.7 Timed Events

The server performs certain events at a specified time or after a specified time delay. A job may have an `execution_time` attribute set to a time in the future. When that time is reached, the job state is updated. If the server is unable to make connection with another server, it is to retry after a time specified by the routing queue attribute `route_retry_time`.

### 3.7.8 Event Logging

The PBS server maintains an event logfile, the format and contents of which are documented in ["Event Logging" on page 539 in the PBS Professional Administrator's Guide](#).

### 3.7.9 Accounting

The PBS server maintains an accounting file, the format and contents of which are documented in ["Accounting" on page 589 in the PBS Professional Administrator's Guide](#).

## 3.8 Resource Management

PBS performs resource allocation at job initiation in two ways depending on the support provided by the host system. Resources are either reservable or non reservable.

---

### 3.8.1 Resource Limits

When submitting a job, a user may specify the hard limit of usage for resources known to the system on which the job will run. If the executing job usage of resources exceed the specified limit, the job is aborted. If the user does not specify a limit for a resource type, the limit may be set to a default established by the PBS administrator. The default limit is taken from the first of the following attributes which is set:

1. The current queue's attribute `resources_default`.
2. The server's attribute `resources_default`.
3. The current queue's attribute `resources_max`.
4. The server's attribute `resources_max`.

If the user does not specify a limit for a resource and a default is not established via one of the above attributes, the usage of the resource is unlimited.

### 3.8.2 Resource Names

For additional information, see [“List of Built-in Resources” on page 255 of the PBS Professional Reference Guide](#) where all resource names are documented.

## 3.9 Network Protocol

The PBS system fits into a client - server model, with a batch client making a request of a batch server and the server replying. This client - server communication necessitates an interprocess communication method and a data exchange (data encoding) format. Since the client and server may reside on different systems, the interprocess communication must be supportable over a network.

While the basic PBS system fits nicely into the client - server model, it also has aspects of a transaction system. When jobs are being moved between servers, it is critical that the jobs are not lost or replicated. Updates to a batch job must be applied once and only once. Thus the operation must be atomic. Most of the client to server requests consist of a single message. Treating these requests as an atomic operation is simple. One request, "Queue Job", is more complex and involves several messages, or subrequests, between the client and the server. Any of these subrequests might be rejected by the server. It is important that either side of the connection be able to abort the request (transaction) without losing or replicating the job. The network connection also might be lost during the request. Recovery from a partially transmitted request sequence is critical. The sequence of recovery from lost connections is discussed in the Queue Job Request description.

The batch system data exchange protocol must be built on top of a reliable stream connection protocol. PBS uses TCP/IP and the socket interface to the network. Either the Simple Network Interface, SNI, or the Detailed Network Interface, DNI, as specified by POSIX.12, Protocol Independent Interfaces, could be used as a replacement.

### 3.9.1 General DIS Data Encoding

The purpose of the “Data is Strings” encoding is to provide a simple, fast, small, machine independent form for encoding data to a character string and back again. Because data can be decoded directly into the final internal data structures, the number of data copy operations are reduced. Data items are represented as people think of them, but preceded with a count of the length of each data item. For small positive integers, it is impossible to tell from the encoded data whether they came from `signed chars`, `shorts`, `ints`, or `longs`. Similarly, for small negative numbers, the only thing that can be determined from the encoded data is that the source datum was not unsigned. It is impossible to



---

tell the word size of the encoding machine, or whether it uses 2's complement, one's complement or sign - magnitude representation, or even if it uses binary arithmetic. All of the basic C data types are handled. Signed and unsigned chars, shorts, ints, longs produce integers. NULL terminated and counted strings produce counted strings (with the terminating NULL removed). Floats, doubles, and long doubles produce real numbers. Complex data must be built up from the basic types. Note that there is no type tagging, so the type and sequence of data to be decoded must be known in advance.



# Batch Interface Library (IFL)

The primary external application programming interface to PBS is the Batch Interface Library, or IFL. This library provides a means of building new batch clients. Any batch service request can be invoked through calls to the batch interface library. Users may wish to build a job which could status itself or spawn off new jobs. Or they may wish to customize the job status display rather than use `qstat`. Administrators may use the interface library to build new control commands.

## 4.1 Interface Library Overview

The IFL provides a user-callable function corresponding to each batch client command. There is (approximately) a one to one correlation between commands and batch service requests. Additional routines are provided for network connection management. The user callable routines are declared in the header file `PBS_ifl.h`. Users open a connection with a batch server via a call to `pbs_connect()`. Multiple connections are supported. Before a connection is established, `pbs_connect()` will fork and exec an `pbs_iff` process, as shown in figure 4-1 below. The purpose of `pbs_iff` is to provide the user a credential which validates the user's identity. This credential is included in each batch request. The provided credential prevents a user from spoofing another user's identity.

The credential that is sent to the server consists of: a) user's name from the password file based on running `pbs_iff`'s "real uid" value, and b) unprivileged, client-side port value associated with the original `pbs_connect` request message to the server. The server looks at the entries in its connection table to try and find the entry having these two pieces of information, and which is not yet marked authenticated. To be believed, this information must be gotten from a connection having a privileged, remote-end, port value.

After all requests have been made to a server, its connection is closed via a call to `pbs_disconnect()`.

Users request service of a batch server by calling the appropriate library routine and passing it the required parameters. The parameters correspond to the options and operands on the commands. It is the user's responsibility to ensure the parameters have correct syntax. Each function will return zero upon success and a non-zero error code on failure. These error codes are available in the header file `PBS_error.h`. The library routine will accept the parameters and build the corresponding batch request, then pass it to the server.

To use `pbs_connect` with Windows, initialize the network library and link with `winsock2`. Call `winsock_init()` before calling `pbs_connect()`, and link against the `ws2_32.lib` library.

Any user-written programs using the IFL API must link with the `pthread` library.

## 4.2 Interface Library Routines

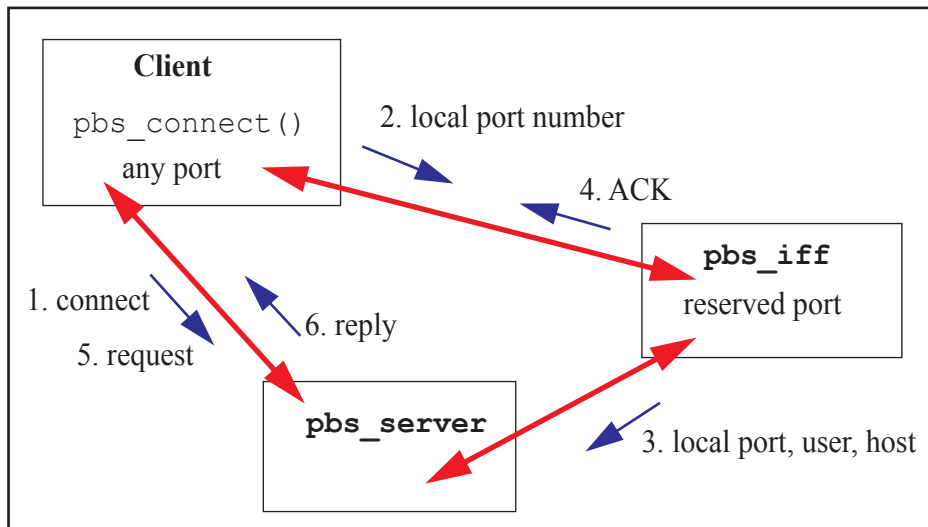


Figure 4-1: Interface Between Client, IFF, and Server

The following manual pages describe the user-callable functions in the IFL.

**pbs\_alterjob**

alter PBS batch job

**SYNOPSIS**

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_alterjob(int connect, char *job_id, struct attrl *attrib, char *extend)
```

**DESCRIPTION**

Issue a batch request to alter a batch job.

A Modify Job batch request is generated and sent to the server over the connection specified by connect which is the return value of pbs\_connect().

The argument, job\_id, identifies which job is to be altered. It is specified in the form: sequence\_number.server

The parameter, attrib, is a pointer to an attrl structure which is defined in pbs\_ifl.h as:

```
struct attrl {
    char *name;
    char *resource;
    char *value
    struct attrl *next;
};
```

The attrib list is terminated by the first entry where next is a null pointer.

The name member points to a string which is the name of the attribute. The value member points to a string which is the value of the attribute. The attribute names are defined in pbs\_ifl.h.

If attrib itself is a null pointer, then no attributes are altered.

Associated with an attribute of type ATTR\_I (the letter ell) is a resource name indicated by resource in the attrl structure. All other attribute types should have a pointer to a null string ("" ) for resource .

If the resource of the specified resource name is already present in the job's Resource\_List attribute, it will be altered to the specified value. If the resource is not present in the attribute, it is added.

Certain attributes of a job may or may not be alterable depending on the state of the job; see qalter(1B).

The parameter, extend, is reserved for implementation-defined extensions.

**SEE ALSO**

qalter(1B), qhold(1B), qrls(1B), qsub(1B), pbs\_connect(3B), pbs\_holdjob(3B), and pbs\_rlsjob(3B)

**DIAGNOSTICS**

When the batch request generated by pbs\_alterjob() function has been completed successfully by a batch server, the routine will return 0 (zero). Otherwise, a non zero error is returned. The error number is also set in pbs\_erno.

**pbs\_connect**

connect to a PBS batch server

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_connect(char *server)
    extern char *pbs_server;
```

## DESCRIPTION

A virtual stream (TCP/IP) connection is established with the server specified by server.

This function must be called before any of the other pbs\_ functions. They will transmit their batch requests over the connection established by this function. Multiple requests may be issued over the connection before it is closed.

The connection should be closed by a call to pbs\_disconnect() when all requests have been sent to the server.

The parameter called server is of the form:

```
host_name[:port].
```

If port is not specified, the standard PBS port number will be used.

If the parameter, server, is either the null string or a null pointer, a connection will be opened to the default server. The default server is defined by (a) the setting of the environment variable PBS\_DEFAULT which contains a destination, or (b) by adding the parameter PBS\_SERVER to the global configuration file /etc/pbs.conf.

The variable pbs\_server, declared in pbs\_ifl.h, is set on return to point to the server name to which pbs\_connect() connected or attempted to connect.

pbs\_connect() determines whether or not the complex has a failover server configured. It also determines which server is the primary and which is the secondary. pbs\_connect() is called by client commands, and directs traffic to the correct server.

In order to use pbs\_connect with Windows, initialize the network library and link with winsock2. To do this, call winsock\_init() before calling pbs\_connect(), and link against the ws2\_32.lib library.

## SEE ALSO

```
qsub(1B), pbs_alterjob(3B), pbs_deljob(3B), pbs_disconnect(3B),
pbs_geterrmsg(3B), pbs_holdjob(3B), pbs_locjob(3B), pbs_manager(3B),
pbs_movejob(3B), pbs_msgjob(3B), pbs_rerunjob(3B), pbs_rlsjob(3B),
pbs_runjob(3B), pbs_selectjob(3B), pbs_selstat(3B), pbs_sigjob(3B),
pbs_statjob(3B), pbs_statque(3B), pbs_statserver(3B), pbs_submit(3B),
pbs_terminate(3B), pbs_server(8B)
```

## DIAGNOSTICS

When the connection to batch server has been successfully created, the routine will return a connection identifier which is positive. Otherwise, a negative value is returned. The error number is set in pbs\_erno.

**pbs\_default**

return the name of the default PBS server

**SYNOPSIS**

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
char *pbs_default()
```

**DESCRIPTION**

A character string is returned containing the name of the default PBS server. The default server is defined by (a) the setting of the environment variable `PBS_DEFAULT` which contains a destination, or (b) by adding the parameter `PBS_SERVER` to the global configuration file `/etc/pbs.conf`.

**DIAGNOSTICS**

If the default server cannot be determined, a NULL value is returned.

**SEE ALSO**

`qsub(1B)`, `pbs_connect(3B)`, `pbs_disconnect(3B)`

**pbs\_deljob**

delete a PBS batch job

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_deljob(int connect, char *job_id, char *extend)
```

## DESCRIPTION

Issue a batch request to delete a batch job. If the batch job is running, the execution server will send the SIGTERM signal followed by SIGKILL .

A Delete Job batch request is generated and sent to the server over the connection specified by connect which is the return value of pbs\_connect().

The argument, job\_id, identifies which job is to be deleted. It is specified in the form:

```
sequence_number.server
```

The argument, extend, is overloaded to serve more than one purpose. If extend points to a string other than the above, it is taken as text to be appended to the message mailed to the job owner. This mailing occurs if the job is deleted by a user other than the job owner.

## SEE ALSO

qdel(1B) and pbs\_connect(3B)

## DIAGNOSTICS

When the batch request generated by the pbs\_deljob() function has been completed successfully by a batch server, the routine will return 0 (zero). Otherwise, a non zero error is returned. The error number is also set in pbs\_erno.



---

**pbs\_delresv**

delete a reservation

**SYNOPSIS**

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_delresv(int connect, char *resv_id, char *extend)
```

**DESCRIPTION**

Issue a batch request to delete a reservation. If the reservation is in state RESV\_RUNNING, and there are jobs remaining in the reservation queue, the jobs will be deleted before the reservation is deleted.

A Delete Reservation batch request is generated and sent to the server over the connection specified by connect which is the return value of pbs\_connect().

The argument, resv\_id, identifies which reservation is to be deleted, it is specified in the form:

```
R<sequence_number>.<server>
```

The argument, extend is currently unused.

**SEE ALSO**

pbs\_rdel(1B) and pbs\_connect(3B)

**DIAGNOSTICS**

When the batch request generated by the pbs\_delresv() function has been completed successfully by a batch server, the routine will return 0 (zero). Otherwise, a non zero error is returned. The error number is also set in pbs\_erno.

**pbs\_disconnect**

disconnect from a PBS batch server

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_disconnect(int connect)
```

## DESCRIPTION

The virtual stream connection specified by connect, which was established with a server by a call to pbs\_connect(), is closed.

## SEE ALSO

pbs\_connect(3B)

## DIAGNOSTICS

When the connection to batch server has been successfully closed, the routine will return zero. Otherwise, a non zero error is returned.

The error number is also set in pbs\_erno.

**pbs\_geterrmsg**

get error message for last PBS batch operation

**SYNOPSIS**

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
char *pbs_geterrmsg(int connect)
```

**DESCRIPTION**

Return the error message text associated with a batch server request.

If the preceding batch interface library call over the connection specified by connect resulted in an error return from the server, there may be an associated text message. If it exists, this function will return a pointer to the null terminated text string.

**SEE ALSO**

pbs\_connect(3B)

**DIAGNOSTICS**

If an error text message was returned by a server in reply to the previous call to a batch interface library function, pbs\_geterrmsg() will return a pointer to it. Otherwise, pbs\_geterrmsg() returns the null pointer.

**pbs\_holdjob**

place a hold on a PBS batch job

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_holdjob(int connect, char *job_id, char *hold_type, char *extend)
```

## DESCRIPTION

Issue a batch request to place a hold upon a job.

A Hold Job batch request is generated and sent to the server over the connection specified by connect which is the return value of pbs\_connect().

The argument, job\_id, identifies which job is to be held, it is specified in the form: sequence\_number.server

The parameter, hold\_type, contains the type of hold to be applied. The possible values are defined in pbs\_ifl.h.

If hold\_type is either a null pointer or points to a null string, USER\_HOLD will be applied.

The parameter, extend, is reserved for implementation-defined extensions.

## SEE ALSO

qhold(1B), pbs\_connect(3B), pbs\_alterjob(3B), and pbs\_rlsjob(3B)

## DIAGNOSTICS

When the batch request generated by pbs\_holdjob () function has been completed successfully by a batch server, the routine will return 0 (zero). Otherwise, a non zero error is returned. The error number is also set in pbs\_erno.

---

**pbs\_locjob**

locate current location of a PBS batch job

**SYNOPSIS**

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
char *pbs_locjob(int connect, char *job_id, char *extend)
```

**DESCRIPTION**

Issue a batch request to locate a batch job. If the server currently manages the batch job, or knows which server does currently manage the job, it will reply with the location of the job.

A Locate Job batch request is generated and sent to the server over the connection specified by connect which is the return value of pbs\_connect().

The argument, job\_id, identifies which job is to be located, it is specified in the form:

```
sequence_number.server
```

The argument, extend, is reserved for implementation-defined extensions. It is not currently used by this function.

The return value is a pointer to a character string which contains the current location if known. The syntax of the location string is:

```
server_name
```

If the location of the job is not known, the return value is the NULL pointer.

**SEE ALSO**

qsub(1B) and pbs\_connect(3B)

**DIAGNOSTICS**

When the batch request generated by the pbs\_locjob() function has been completed successfully by a batch server, the routine will return a non null pointer to the destination. Otherwise, a null pointer is returned. The error number is set in pbs\_erno.

**pbs\_manager**

modifies a PBS batch object

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_manager(int connect, int command, int obj_type, char *obj_name,
struct attrpl *attrib, char *extend)
```

## DESCRIPTION

Issue a batch request to perform administration functions at a server. With this request, server objects such as queues can be created and deleted, and have their attributes set and unset.

A Manage batch request is generated and sent to the server over the connection specified by connect which is the return value of pbs\_connect(). This request requires full batch administrator privilege.

The parameter, command, specifies the operation to be performed. See pbs\_ifl.h:

```
MGR_CMD_CREATE  creates the object
MGR_CMD_DELETE  deletes the object
MGR_CMD_SET     sets the value
MGR_CMD_UNSET   unsets the value
MGR_CMD_IMPORT  imports the hook
MGR_CMD_EXPORT  exports the hook
```

The parameter, obj\_type, declares the type of object upon which the command operates. See pbs\_ifl.h:

```
MGR_OBJ_SERVER  Server object
MGR_OBJ_QUEUE   Queue object
MGR_OBJ_NODE    Node object
MGR_OBJ_HOOK    Hook object
```

The parameter, obj\_name, is the name of the specific object.

The parameter, attrib, is a pointer to an attrpl structure which is defined in pbs\_ifl.h as:

```
struct attrpl {
    char *name;
    char *resource;
    char *value;
    enum batch_op op;
    struct attrpl *next;
};
```

The attrib list is terminated by the first entry where next is a null pointer.

The name member points to a string which is the name of the attribute.

If the attribute is one which contains a set of resources, the specific

resource is specified in the structure member `resource` . Otherwise, the member resource is pointer to a null string.

The value member points to a string which is the new value of the attribute. For parameterized limit attributes, this string contains all parameters for the attribute.

The `op` member defines the manner in which the new value is assigned to the attribute. The operators are: `enum batch_op { ..., SET, UNSET, INCR, DECR };`

For `MGR_CMD_IMPORT`, specify `attrpl "name" as "content-type", "content-encoding", and "input-file"` along with the corresponding "value" and an "op" of SET.

For `MGR_CMD_EXPORT`, specify `attrpl "name" as "content-type", "content-encoding", and "output-file"` along with the corresponding "value" and an "op" of SET.

The parameter `extend` is reserved for implementation-defined extensions.

Privilege required for functions depends on whether those functions are used with hooks. When not used with hooks:

Functions `MGR_CMD_CREATE` and `MGR_CMD_DELETE` require PBS Manager privilege.  
Functions `MGR_CMD_SET` and `MGR_CMD_UNSET` require PBS Manager or Operator privilege.

When used with hooks:

All commands require root privilege on the server host.

Functions `MGR_CMD_IMPORT`, `MGR_CMD_EXPORT`, and `MGR_OBJ_HOOK` are used only with hooks, and therefore require root privilege on the server host.

## DIAGNOSTICS

When the `batch` request generated by `pbs_manager()` function has been completed successfully by a batch server, the routine will return 0 (zero). Otherwise, a non zero error is returned. The error number is also set in `pbs_erno`.

## SEE ALSO

`qmgr(1B)`, `pbs_connect(3B)`

**pbs\_modify\_resv**

modify a PBS reservation

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
char *pbs_modify_resv(int server_connect, char *resv_id, struct attrpl *attrib, char *extend)
```

## DESCRIPTION

Issue a batch request to modify a reservation.

A Modify Reservation batch request is generated and sent to the server. The parameter `server_connect` is the socket on which we connect to the server. The parameter `resv_id` is the reservation ID.

The parameter `attrib` is a list of attributes to be changed. Each attribute is an `attrpl` structure which is defined in `pbs_ifl.h` as:

```
struct attrl {
    char *name;
    char *resource;
    char *value;
    struct attrl *next;
    enum batch_op op;
};
```

The `attrib` list is terminated by the first entry where `next` is a null pointer.

The `name` member points to a string which is the name of the attribute. The `value` member points to a string which is the value of the attribute. The attribute names are defined in `pbs_ifl.h`.

If an attribute is not named in the `attrib` array, the default action is taken. It is either assigned the default value or is not passed with the reservation. The action depends on the attribute. If `attrib` itself is a null pointer, then the default action is taken for each attribute.

An attribute of type `ATTR_1` (the letter ell) has a resource name indicated by `resource` in the `attrl` structure. All other attribute types should have a pointer to a null string for `resource`.

The `op` member is forced to a value of `SET` by `pbs_modify_resv()`.

The parameter, `extend`, is reserved for implementation-defined extensions.

The return value is a character string which is the reservation identifier assigned to the job by the server. The space for the reservation identifier string is allocated by `pbs_modify_resv()` and should be released via a call to `free()` by the user when no longer needed.

## SEE ALSO

`pbs_rsub(1B)` and `pbs_connect(3B)`

## DIAGNOSTICS

When the batch request generated by `pbs_modify_resv()` function has been completed successfully by a batch server, the routine will return a pointer to a character string which is the reservation identifier of the modified reservation. Otherwise, a null pointer is returned and the error code is set in `pbs_error`.



---

## pbs\_movejob

move a PBS batch job to a new destination

### SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_movejob(int connect, char *job_id, char *destination,
char *extend)
```

### DESCRIPTION

Issue a batch request to move a job to a new destination. The job is removed from the present queue and instantiated in a new queue.

A Move Job batch request is generated and sent to the server over the connection specified by connect which is the return value of pbs\_connect().

The job\_id parameter identifies which job is to be moved; it is specified in the form: sequence\_number.server

The destination parameter specifies the new destination for the job. It is specified as:

```
[queue][@server] .
```

If destination is a null pointer or a null string, the destination will be the default queue at the current server. If destination specifies a queue but not a server, the destination will be the named queue at the current server. If destination specifies a server but not a queue, the destination will be the default queue at the named server. If destination specifies both a queue and a server, the destination is that queue at that server.

A job in the Running, Transiting, or Exiting state cannot be moved.

The parameter, extend, is reserved for implementation-defined extensions.

### SEE ALSO

qmove(1B), qsub(1B), and pbs\_connect(3B)

### DIAGNOSTICS

When the batch request generated by pbs\_movejob() function has been completed successfully by a batch server, the routine will return 0 (zero). Otherwise, a non zero error is returned. The error number is also set in pbs\_errno.

**pbs\_msgjob**

record a message for a running PBS batch job

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_msgjob(int connect, char *job_id, int file, char *message,
char *extend)
```

## DESCRIPTION

Issue a batch request to write a message in an output file of a batch job.

A Message Job batch request is generated and sent to the server over the connection specified by `connect` which is the return value of `pbs_connect()`.

The argument, `job_id`, identifies the job to which the message is to be sent; it is specified in the form:  
`sequence_number.server`

The parameter, `file`, indicates the file or files to which the message string is to be written. See `pbs_ifl.h` for acceptable values.

The parameter, `message`, is the message string to be written.

The parameter, `extend`, is reserved for implementation-defined extensions.

## SEE ALSO

`qmsg(1B)` and `pbs_connect(3B)`

## DIAGNOSTICS

When the batch request generated by `pbs_msgjob()` function has been completed successfully by a batch server, the routine will return 0 (zero). Otherwise, a non zero error is returned. The error number is also set in `pbs_erno`.

**pbs\_orderjob**

reorder PBS batch jobs in a queue

**SYNOPSIS**

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_orderjob(int connect, char *job_id1, char *job_id2,
char *extend)
```

**DESCRIPTION**

Issue a batch request to swap the order of two jobs with in a single queue.

An Order Job batch request is generated and sent to the server over the connection specified by connect which is the return value of pbs\_connect().

The parameters job\_id1 and job\_id2 identify which jobs are to be swapped. They are specified in the form:

```
sequence_number.server
```

The parameter, extend, is reserved for implementation-defined extensions.

**SEE ALSO**

qorder(1B), qmove(1B), qsub(1M), and pbs\_connect(3B)

**DIAGNOSTICS**

When the batch request generated by pbs\_orderjob() function has been completed successfully by a batch server, the routine will return 0 (zero). Otherwise, a non zero error is returned. The error number is also set in pbs\_erno.

**pbs\_relnodesjob**

release some or all of the non-primary-execution-host  
vnodes assigned to a PBS job

## SYNOPSIS

```
#include <pbs_error.h>  
#include <pbs_ifl.h>
```

```
int pbs_relnodesjob (int connect, char *job_id, char *node_list, char  
*extend)
```

## DESCRIPTION

Issue a batch request to release some or all of the vnodes not on the primary execution host that are assigned to a batch job.

A RelnodesJob batch request is generated and sent to the server over the connection specified by `connect`, which is the return value of `pbs_connect()`.

The argument, `job_id`, identifies the job whose vnodes are to be released; it is specified in the form:

```
<sequence number>.<server>
```

The parameter, `node_list`, is a list of vnode names separated by plus signs ("+") whose parent MoM is not the MoM on the primary execution host. If `node_list` is NULL, it refers to all the vnodes that are not on the primary execution host that are assigned to the job.

The parameter, `extend`, is reserved for implementation-defined extensions.

## SEE ALSO

`pbs_connect(3B)`

## DIAGNOSTICS

When the `pbs_relnodesjob()` function has been completed successfully by a batch server, the routine will return 0 (zero). Otherwise, a non-zero error is returned. The error number is also set in `pbs_erno`.

---

**pbs\_rerunjob**

rerun a PBS batch job

**SYNOPSIS**

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_rerunjob(int connect, char *job_id, char *extend)
```

**DESCRIPTION**

Issue a batch request to rerun a batch job.

A Rerun Job batch request is generated and sent to the server over the connection specified by connect which is the return value of pbs\_connect().

If the job is marked as being not rerunnable, the request will fail and an error will be returned.

The argument, job\_id, identifies which job is to be rerun it is specified in the form: sequence\_number.server

The parameter, extend, is reserved for implementation-defined extensions.

**SEE ALSO**

qrerun(1B), qsub(1B), and pbs\_connect(3B)

**DIAGNOSTICS**

When the batch request generated by pbs\_rerunjob() function has been completed successfully by a batch server, the routine will return 0 (zero). Otherwise, a non zero error is returned. The error number is also set in pbs\_erno.

**pbs\_rlsjob**

release a hold on a PBS batch job

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_rlsjob(int connect, char *job_id, char *hold_type,
char *extend)
```

## DESCRIPTION

Issue a batch request to release a hold from a job.

A Release Job batch request is generated and sent to the server over the connection specified by `connect` which is the return value of `pbs_connect()`.

The argument, `job_id`, identifies the job from which the hold is to be released, it is specified in the form:

```
sequence_number.server
```

The parameter, `hold_type`, contains the type of hold to be released. The possible values are defined in `pbs_ifl.h`.

If `hold_type` is either a null pointer or points to a null string, `USER_HOLD` will be released.

The parameter, `extend`, is reserved for implementation-defined extensions.

## SEE ALSO

`qrls(1B)`, `qhold(1B)`, `qalter(1B)`, `pbs_alterjob(3B)`, `pbs_connect(3B)`, and `pbs_holdjob(3B)`

## DIAGNOSTICS

When the batch request generated by `pbs_rlsjob()` function has been completed successfully by a batch server, the routine will return 0 (zero). Otherwise, a non zero error is returned. The error number is also set in `pbs_errno`.

---

**pbs\_runjob, pbs\_asyrunch**

run a PBS batch job, asynchronous batch job

**SYNOPSIS**

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_runjob(int connect, char *job_id, char *location, char *extend)
```

```
int pbs_asyrunch(int connect, char *job_id, char *location,
char *extend)
```

**DESCRIPTION**

Issue a batch request to run a batch job.

For `pbs_runjob()` a "Run Job" batch request is generated and sent to the server over the connection specified by `connect` which is the return value of `pbs_connect()`. The server will reply when the job has started execution unless file in-staging is required. In that case, the server will reply when the staging operations are started.

For `pbs_asyrunch()` an "Asynchronous Run Job" request is generated and sent to the server over the connection. The server will validate the request and reply before initiating the execution of the job. This version of the call can be used to reduce latency in scheduling, especially when the scheduler must start a large number of jobs.

These requests requires that the issuing user have operator or administrator privilege.

The argument, `job_id`, identifies which job is to be run it is specified in the form:  
sequence\_number.server

The argument, `location`, if not the null pointer or null string, specifies the location where the job should be run, and optionally the resources to use. The location is the same as the `-H` option to the `qrun` command. See the description of `qrun -H`, both with and without resources specified, in the `qrun.8B` man page.

The argument, `extend`, is reserved for implementation-defined extensions.

**SEE ALSO**

`qrun(8B)`, `qsub(1B)`, and `pbs_connect(3B)`

**DIAGNOSTICS**

When the batch request generated by the `pbs_runjob()` or `pbs_asyrunch()` functions has been completed successfully by a batch server, the routines will return 0 (zero). Otherwise, a non zero error is returned. The error number is also set in `pbs_erno`.

**pbs\_selectjob**

select PBS batch jobs

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
char **pbs_selectjob(int connect, struct attropl *attrib, char *extend)
```

## DESCRIPTION

Issue a batch request to select jobs which meet certain criteria. `pbs_selectjob()` returns an array of job identifiers which met the criteria.

The `attropl` struct contains the list of selection criteria.

Initially all batch jobs are selected for which the user is authorized to query status. This set may be reduced or filtered by specifying certain attributes of the jobs.

A Select Jobs batch request is generated and sent to the server over the connection specified by `connect` which is the return value of `pbs_connect()`.

The argument, `attrib`, is a pointer to an `attropl` structure which is defined in `pbs_ifl.h` as:

```
struct attropl {
    struct attropl *next;
    char *name;
    char *resource;
    char *value;
    enum batch_op op;
};
```

The `attrib` list is terminated by the first entry where `next` is a null pointer.

The `name` member points to a string which is the name of the attribute. Not all of the job attributes may be used as a selection criteria. The `resource` member points to a string which is the name of a resource. This member is only used when `name` is set to `ATTR_I`. Otherwise, `resource` should be a pointer to a null string. The `value` member points to a string which is the value of the attribute or resource. The attribute names are listed in `pbs_job_attributes.7B`.

The `op` member defines the operator in the logical expression:

```
value operator current_value
```

The logical expression must evaluate as true for the job to be selected. The permissible values of `op` are defined in `pbs_ifl.h` as:

```
enum batch_op { ..., EQ, NE, GE, GT, LE, LT, ... }; .
```

The attributes marked with (E) in the description above may only be selected with the equal, EQ, or not equal, NE, operators.



---

If `attrib` itself is a null pointer, then no selection is done on the basis of attributes.

The return value is a pointer to a null terminated array of character pointers. Each character pointer in the array points to a character string which is a job identifier in the form:

```
sequence_number.server@server
```

The array is allocated by `pbs_selectjob` via `malloc()`. When the array is no longer needed, the user is responsible for freeing it by a call to `free()`.

The parameter, `extend`, is reserved for implementation-defined extensions.

#### Finished and Moved Jobs

In order to get information on finished and moved jobs, you must add an 'x' character to the `extend` parameter. The `extend` parameter is a character string; set one character to be the 'x' character. For example:

```
pbs_selectjob ( ..., ..., extend) ...
```

To get information on finished and moved jobs only, specify the Finished ('F') and moved ('M') job states. You must also use the `extend` character string containing the 'x' character.

Subjobs are not considered finished until the parent array job is finished.

#### SEE ALSO

`qselect(1B)`, `pbs_alterjob(3B)`, and `pbs_connect(3B)`

#### DIAGNOSTICS

When the batch request generated by `pbs_selectjob()` function has been completed successfully by a batch server, the routine will return a pointer to the array of job identifiers. If no jobs met the criteria, the first pointer in the array will be the null pointer.

If an error occurred, a null pointer is returned and the error is available in the global integer `pbs_erno`.

**pbs\_selstat**

obtain status of selected PBS batch jobs

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
struct batch_status *pbs_selstat(int connect, struct attrpl *sel_list, struct attrl *rattrib, char *extend)
```

```
void pbs_statfree(struct batch_status *psj)
```

## DESCRIPTION

Issue a batch request to examine the status of jobs which meet certain criteria. `pbs_selstat()` returns a list of `batch_status` structures for those jobs which met the selection criteria.

The `sel_list` struct holds the selection criteria. The `rattrib` struct holds the list of attributes whose values are to be returned.

This function is a combination of `pbs_selectjob()` and `pbs_statjob()`. It is an extension to the POSIX Batch standard.

Initially all batch jobs are selected for which the user is authorized to query status. This set may be reduced or filtered by specifying certain attributes of the jobs.

A Select Status batch request is generated and sent to the server over the connection specified by `connect` which is the return value of `pbs_connect()`.

The parameter, `sel_list`, is a pointer to an `attrpl` structure which is defined in `pbs_ifl.h` as:

```
struct attrpl {
    struct attrpl *next;
    char *name;
    char *resource;
    char *value;
    enum batch_op op;
};
```

The `sel_list` list is terminated by the first entry where `next` is a null pointer.

The `name` member points to a string which is the name of the attribute. Not all of the job attributes may be used as a selection criteria. The `resource` member points to a string which is the name of a resource. This member is only used when `name` is set to `ATTR_I`, otherwise it should be a pointer to a null string. The `value` member points to a string which is the value of the attribute or resource. The attribute names are listed in `pbs_job_attributes.7B`.

The `op` member defines the operator in the logical expression:

```
value operator current_value
```

The logical expression must evaluate as true for the job to be selected. The permissible values of `op` are defined in `pbs_ifl.h` as:

```
enum batch_op { ..., EQ, NE, GE, GT, LE, LT, ... };
```

The attributes marked with (E) in the description above may only be selected with the equal, EQ, or not equal, NE, operators.

If `sel_list` itself is a null pointer, then no selection is done on the basis of attributes.

The parameter, `rattrib`, is a pointer to an `attrl` structure which is defined below. The `rattrib` list is terminated by the first entry where `next` is a null pointer. If `attrib` is given, then only the attributes in the list are returned by the server. Otherwise, all the attributes of a job are returned. When an `attrib` list is specified, the `name` member is a pointer to an attribute name as listed in `pbs_alter(3)` and `pbs_submit(3)`. The `resource` member is only used if the `name` member is `ATTR_I`, otherwise it should be a pointer to a null string. The `value` member should always be a pointer to a null string.

The `return` value is a pointer to a list of `batch_status` structures or the null pointer if no jobs can be queried for status. The `batch_status` structure is defined in `pbs_ifl.h` as

```
struct batch_status {
    struct batch_status *next;
    char *name;
    struct attrl *attribs;
    char *text;
}
```

The entry, `attribs`, is a pointer to a list of `attrl` structures defined in `pbs_ifl.h` as:

```
struct attrl {
    struct attrl *next;
    char *name;
    char *resource;
    char *value;
};
```

It is up to the user to free the list of `batch_status` structures when no longer needed, by calling `pbs_statfree()`.

The `extend` parameter is for optional features and/or additions. Normally, this should be a null pointer.

#### Finished and Moved Jobs

In order to get information on finished and moved jobs, you must add an 'x' character to the `extend` parameter. The `extend` parameter is a character string; set one character to be the 'x' character. For example:  
`pbs_selstat ( ..., ..., ..., extend) ...`

To get information on finished and moved jobs only, specify the Finished ('F') and moved ('M') job states. You must also use the `extend` character string containing the 'x' character. For example:

```
sel_list->next = sel_list;
sel_list->name = ATTR_state;
sel_list->value = "MF";
sel_list->op = EQ;
pbs_selstat ( ..., sel_list, ..., extend) ...
```

Subjobs are not considered finished until the parent array job is finished.

#### SEE ALSO

`qselect(1B)`, `pbs_alterjob(3B)`, `pbs_connect(3B)`, `pbs_statjob(3B)`, and `pbs_selectjob(3B)`.

#### DIAGNOSTICS

When the batch request generated by `pbs_selstat()` function has been completed successfully by a batch server, the routine will return a pointer to the list of `batch_status` structures. If no jobs met the criteria or an error occurred, the return will be the null pointer. If an error occurred, the global integer `pbs_errno` will be set to a nonzero value.

**pbs\_sigjob**

send a signal to a PBS batch job

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_sigjob(int connect, char *job_id, char *signal, char *extend)
```

## DESCRIPTION

Issue a batch request to send a signal to a batch job.

A Signal Job batch request is generated and sent to the server over the connection specified by `connect` which is the return value of `pbs_connect()`. If the batch job is in the running or suspended state, the batch server will send the job the signal number corresponding to the signal named in `signal`.

The `job_id` argument identifies which job is to be signaled. It is specified in the form: `sequence_number.server`

The `signal` argument is the name of a signal. It may be the alphabetic form with or without the SIG prefix, or it may be a numeric string for the signal number. If the name of the signal is not a recognized signal name on the execution host, no signal is sent and an error is returned. Certain special names are recognized:

`suspend` can be used only on running jobs. This signal puts the job into a suspended state.

`resume` can be used only on suspended jobs. This signal marks the job so that the scheduler can resume the job when resources are available.

`admin-suspend` can be used only on running jobs. This signal puts the job into a suspended state, and puts the job's vnodes into the maintenance state.

`admin-resume` can be used only on admin-suspended jobs. This signal directly resumes the job. When the last admin-suspended job has been admin-resumed, the vnode leaves the maintenance state.

The `parameter`, `extend`, is reserved for implementation-defined extensions.

## SEE ALSO

`qsig(1B)` and `pbs_connect(3B)`

## DIAGNOSTICS

When the batch request generated by `pbs_sigjob()` function has been completed successfully by a batch server, the routine will return 0 (zero). Otherwise, a non zero error is returned. The error number is also set in `pbs_errno`.

---

**pbs\_statfree**

free a PBS status object

**SYNOPSIS**

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
void pbs_statfree(struct batch_status *psj)
```

**DESCRIPTION**

Frees the specified PBS status object returned by `pbs_statque`, `pbs_statserver`, `pbs_stathook`, etc.

The argument is a pointer to a `batch_status` structure. The `batch_status` structure is defined in `pbs_ifl.h` as

```
struct batch_status {
    struct batch_status *next;
    char                *name;
    struct attrl        *attribs;
    char                *text;
}
```

No error information is returned.

**pbs\_statjob**

obtain status of PBS batch jobs

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
struct batch_status *pbs_statjob(int connect, char *id, struct attrl *attrib, char *extend)
```

```
void pbs_statfree(struct batch_status *psj)
```

## DESCRIPTION

Issue a batch request to query and return the status of a specified batch job, a list of batch jobs, or a set of batch jobs at a queue or server.

A Status Job batch request is generated and sent to the server over the connection specified by connect.

## PARAMETERS

The connect parameter is the return value of pbs\_connect().

The id parameter can be a job identifier, a list of job identifiers, or a queue or server identifier.

If id is a job identifier, it is the identifier of the job for which status is requested. It is specified in the form:

```
sequence_number.server
or, for an array job,
sequence_number[],server
```

where the first character of the identifier must be a digit. If the identifier is for an array job but the 't' character is not included in the extend parameter, the status of the array job is returned, but not the status of its subjobs. If the 't' character is included, status for each subjob is returned.

If id is a list of job identifiers, it must be a comma-separated list of job identifiers in a single string. The first character of the string must be a digit. White space outside of a job identifier is ignored. There is no limit to the length of the string except as imposed by available memory.

If id is a destination (server or queue) identifier, the status of all jobs at the destination which the user is authorized to see is returned.

If id is the null pointer or a null string, the status of each job at the server to which the user is connected is returned.

The attrib parameter is a pointer to a list of attributes. If attrib is specified, then only the attributes in the list are returned by the server. Otherwise, all the attributes of a job are returned. The attrib parameter is a pointer to an attrl structure which is defined in pbs\_ifl.h as:

```
struct attrl {
    struct attrl *next;
    char *name;
    char *resource;
    char *value;
};
```

The next member is a pointer to the next entry in the list. The attrib\_list is terminated by the first entry where next is a null pointer.

The name member is a pointer to an attribute name. Attribute names are listed in pbs\_ifl.h.

The resource member specifies the name of the resource in the job's Resource\_List attribute. When attrl describes the job's Resource\_List job attribute, the name member is ATTR\_1. If attrl is not ATTR\_1, resource should be a pointer to a null string.

The value member should always be a pointer to a null string.

The extend parameter is used for extensions. This parameter can consist of characters in any order.

When the extend parameter includes 't', if any array job identifiers are in the set of IDs being queried, the status of each array job is followed by status of each subjob in the array job.

When the extend parameter includes 'x', finished and moved jobs and subjobs can be queried, and their status is included. Subjobs are not considered finished until the parent array job is finished.

#### RETURN VALUES and ERRORS

For a single job, if the job can be queried, the return value is a pointer to a batch\_status structure containing the status of the specified job. If the job cannot be queried, a NULL pointer is returned, and pbs\_erno is set to an error number.

For a list of jobs, if any of the specified jobs can be queried, the return value is a pointer to a batch\_status structure containing the status of all the queryable jobs. If none of the jobs can be queried, a NULL pointer is returned, and pbs\_erno is set to the error number that indicates the reason that the last job in the list could not be queried.

For a queue, if the queue exists, the return value is a pointer to a batch\_status structure containing the status of all the queryable jobs in the queue. If the queue does not exist, a NULL pointer is returned, and pbs\_erno is set to PBSE\_UNKQUE (15018). If the queue exists but contains no queryable jobs, a NULL pointer is returned and pbs\_erno is set to PBSE\_NONE (0).

When querying a server, the connection to the server is already established by pbs\_connect(). If there are jobs at the server, the return value of the query is a pointer to a batch\_status structure containing the status of all the queryable jobs at the server. If the server does not contain any queryable jobs, a NULL pointer is returned and pbs\_erno is set to PBSE\_NONE (0).

The batch\_status structure is defined in pbs\_ifl.h as

```
struct batch_status {
    struct batch_status *next;
    char *name;
    struct attrl *attrlbs;
    char *text;
}
```

It is up to the user to free the structure when no longer needed, by calling pbs\_statfree().

#### SEE ALSO

qstat(1B) and pbs\_connect(3B)

**pbs\_statnode, pbs\_statvnode, pbs\_stathost**

obtain status of PBS vnodes  
or hosts

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>

struct batch_status *pbs_stathost(int connect, char *id,
struct attrl *attrib, char *extend)

struct batch_status *pbs_statnode(int connect, char *id,
struct attrl *attrib, char *extend)

struct batch_status *pbs_statvnode(int connect, char *id,
struct attrl *attrib, char *extend)

void pbs_statfree(struct batch_status *psj)
```

## DESCRIPTION

Issue a batch request to obtain the status of PBS execution hosts or vnodes.

pbs\_stathost returns information about the single host named in the call or about all hosts known to the PBS Server.

pbs\_statnode is identical to pbs\_stathost in function. It is retained for backward compatibility.

pbs\_statvnode returns information about the single virtual node (vnode) named in the call or about all vnodes known to the PBS Server.

A Status Node batch request is generated and sent to the server over the connection specified by connect which is the return value of pbs\_connect().

The id is the name of a host for pbs\_stathost, or a vnode for pbs\_statvnode, or the null string. If id specifies a name, the status of that host or vnode will be returned. If the id is a null string (or null pointer), the status of all hosts or vnodes at the server will be returned.

The parameter, attrib, is a pointer to an attrl structure which is defined in pbs\_ifl.h as:

```
struct attrl {
    struct attrl *next;
    char *name;
    char *resource;
    char *value;
};
```

The attrib list is terminated by the first entry where next is a null



---

pointer. If `attrib` is given, then only the attributes in the list are returned by the server. Otherwise, all the attributes of a node are returned. When an `attrib` list is specified, the `name` member is a pointer to an attribute name. The `resource` member is not used and must be a pointer to a null string. The `value` member should always be a pointer to a null string.

The parameter, `extend`, is reserved for implementation-defined extensions.

The return value is a pointer to a list of `batch_status` structures, which is defined in `pbs_ifl.h` as:

```
struct batch_status {
    struct batch_status *next;
    char *name;
    struct attrl *attribs;
    char *text;
}
```

It is up to the user to free the structure when no longer needed, by calling `pbs_statfree()`.

#### DIAGNOSTICS

When the batch request generated by `pbs_stathost()`, `pbs_statnode()`, or `pbs_statvnode()` function has been completed successfully by a batch server, the routine will return a pointer to the `batch_status` structure. Otherwise, a null pointer is returned and the error code is set in the global integer `pbs_erno`.

#### SEE ALSO

`qstat(1B)`, `pbs_connect(3B)`

**pbs\_statque**

obtain status of PBS batch queues

**SYNOPSIS**

```
#include <pbs_error.h>
#include <pbs_ifl.h>

struct batch_status *pbs_statque(int connect, char *id,
struct attrl *attrib, char *extend)

void pbs_statfree(struct batch_status *psj)
```

**DESCRIPTION**

Issue a batch request to obtain the status of a batch queue.

A Status Queue batch request is generated and sent to the server over the connection specified by `connect` which is the return value of `pbs_connect()`.

The `id` is the name of a queue, in the form:

```
queue_name
```

or the null string. If `queue_name` is specified, the status of the queue named `queue_name` at the server is returned. If the `id` is a null string or null pointer, the status of all queues at the server is returned.

The parameter, `attrib`, is a pointer to an `attrl` structure which is defined in `pbs_ifl.h` as:

```
struct attrl {
    struct attrl *next;
    char *name;
    char *resource;
    char *value;
};
```

The `attrib` list is terminated by the first entry where `next` is a null pointer. If `attrib` is given, then only the attributes in the list are returned by the server. Otherwise, all the attributes of a queue are returned. When an `attrib` list is specified, the `name` member is a pointer to an attribute name as listed in `pbs_alterjob(3B)` and `pbs_submit(3B)`. The `resource` member is only used if the `name` member is `ATTR_1`, otherwise it should be a pointer to a null string. The `value` member should always be a pointer to a null string.

When `pbs_statque` is used to get the attributes of an object, a single `attrl` data structure is returned for each parameterized attribute.

The parameter, `extend`, is reserved for implementation-defined extensions.

The return value is a pointer to a list of `batch_status` structures, which is defined in `pbs_ifl.h` as:

---

```
struct batch_status {
    struct batch_status *next;
    char                *name;
    struct attrl       *attribs;
    char                *text;
}
```

It is up to the user to free the structure when no longer needed, by calling `pbs_statfree()`.

#### SEE ALSO

`qstat(1B)` and `pbs_connect(3B)`

#### DIAGNOSTICS

When the batch request generated by `pbs_statque()` function has been completed successfully by a batch server, the routine will return a pointer to the `batch_status` structure. Otherwise, a null pointer is returned and the error code is set in the global integer `pbs_erno`.

**pbs\_statresv**

obtain status information about reservations

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>

struct batch_status *pbs_statresv(int connect, char *id,
struct attrl *attrib, char *extend)

void pbs_statfree(struct batch_status *psj)
```

## DESCRIPTION

Issue a batch request to obtain the status of a specified reservation or a set of reservations at a destination.

A Status Reservation batch request is generated and sent to the server over the connection specified by connect which is the return value of pbs\_connect().

The parameter, id, is a reservation identifier. A reservation identifier is of the form:

```
R<sequence_number>.<server>
```

If id is the null pointer or a null string, the status of each reservation at the server which the user is authorized to see is returned.

The parameter, attrib, is a pointer to an attrl structure which is defined in pbs\_ifl.h as:

```
struct attrl {
    struct attrl *next;
    char *name;
    char *resource;
    char *value;
};
```

The attrib list is terminated by the first entry where next is a null pointer. If attrib is given, then only the attributes in the list are returned by the server. Otherwise, all the attributes of a reservation are returned. When an attrib list is specified, the name member is a pointer to an attribute name as listed in pbs\_submit\_resv(3). The resource member is only used if the name member is ATTR\_1, otherwise it should be a pointer to a null string. The value member should always be a pointer to a null string.

The parameter, extend, is reserved for implementation-defined extensions.

The return value is a pointer to a list of batch\_status structures or the null pointer if no reservations can be queried for status. The batch\_status structure is defined in pbs\_ifl.h as

```
struct batch_status {
    struct batch_status *next;
```

---

```
char      *name;  
struct attrl  *attribs;  
char      *text;  
}
```

It is up to the user to free the structure when no longer needed, by calling `pbs_statfree()`.

#### SEE ALSO

`pbs_rstat(1B)` and `pbs_connect(3B)`

#### DIAGNOSTICS

When the batch request generated by `pbs_statresv()` function has been completed successfully and the status of each reservation has been returned by the batch server, the routine will return a pointer to the list of `batch_status` structures. If no reservations were available to query or an error occurred, a null pointer is returned. The global integer `pbs_errno` should be examined to determine the cause.

## pbs\_statrsc

obtain status of PBS resources

### SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
struct batch_status *pbs_statrsc(int connect, char *name,
struct attrl *attrib, char *extend)
```

```
void pbs_statfree(struct batch_status *psj)
```

### DESCRIPTION

Issue a batch request to query and return the status of a specified resource, or a set of resources at a server.

A Status Resource batch request is generated and sent to the server over the connection specified by connect.

### PARAMETERS

The connect parameter is the file descriptor which is the connection to a PBS server, and is the return value of pbs\_connect().

The name parameter is the name of the resource to query. To query all resources at the server, pass NULL as the name.

The attrib parameter is a pointer to a list of attributes to query. If attrib is specified, then only the attributes in the list are returned by the server. Otherwise, all the attributes of a resource are returned. The attrib parameter is a pointer to an attrl structure which is defined in pbs\_ifl.h as:

```
struct attrl {
    struct attrl *next;
    char *name;
    char *resource;
    char *value;
};
```

The next member is a pointer to the next entry in the list. The attrib list is terminated by the first entry where next is a null pointer.

The name member is a pointer to an attribute name. Attribute names are listed in pbs\_ifl.h.

The resource member is unused.

The value member should always be a pointer to a null string.

The extend parameter is unused.

### RETURN VALUES and ERRORS

---

For a single resource, if the resource can be queried, the return value is a pointer to a `batch_status` structure containing the status of the specified resource. If the resource cannot be queried, a NULL pointer is returned, and `pbs_erno` is set to an error number.

When querying a server, the connection to the server is already established by `pbs_connect()`. If there are resources at the server, the return value of the query is a pointer to a `batch_status` structure containing the status of all the queryable resources at the server.

In the unlikely event that the server does not contain any queryable resources because the issuer is unprivileged and all resources have the `i` (invisible) flag set, a NULL pointer is returned and `pbs_erno` is set to `PBSE_NONE` (0).

The `batch_status` structure is defined in `pbs_ifl.h` as

```
struct batch_status {
    struct batch_status *next;
    char                *name;
    struct attrl        *attrs;
    char                *text;
}
```

It is up to the user to free the structure when no longer needed, by calling `pbs_statfree()`.

#### SEE ALSO

`qstat(1B)` and `pbs_connect(3B)`

**pbs\_statsched**

obtain status of PBS scheduler

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
struct batch_status *pbs_statsched(int connect, struct attrl *attrib, char *extend)
```

```
void pbs_statfree(struct batch_status *psj)
```

## DESCRIPTION

Issue a batch request to obtain the status of PBS scheduler.

A Status Scheduler batch request is generated and sent to the server.

The parameter `connect` is the return value of `pbs_connect()`.

The parameter, `attrib`, is a pointer to an `attrl` structure which is defined in `pbs_ifl.h` as:

```
struct attrl {
    struct attrl *next;
    char *name;
    char *resource;
    char *value;
};
```

The `attrib` list is terminated by the first entry where `next` is a null pointer. If `attrib` is given, then only the attributes in the list are returned by the server. Otherwise, all the attributes of the scheduler are returned. When an `attrib` list is specified, the `name` member is a pointer to an attribute name as listed in `pbs_alter(3)` and `pbs_submit(3)`. The `resource` member is only used if the `name` member is `ATTR_1`, otherwise it should be a pointer to a null string. The `value` member should always be a pointer to a null string.

The parameter, `extend`, is reserved for implementation-defined extensions.

The return value of `pbs_statsched()` is a pointer to a list of `batch_status` structures, which is defined in `pbs_ifl.h` as:

```
struct batch_status {
    struct batch_status *next;
    char *name;
    struct attrl *attribs;
    char *text;
}
```

It is up to the user to free the `batch_status` structure when it is no longer needed, by calling `pbs_statfree()`.

## SEE ALSO

`qstat(1B)` and `pbs_connect(3B)`

## DIAGNOSTICS

When the batch request generated by `pbs_statsched()` has been completed successfully by the PBS server, `pbs_statsched()` will return a pointer to a `batch_status` structure. Otherwise, a null pointer is returned and the error code is set in `pbs_erno`.



**pbs\_statserver**

obtain status of a PBS batch server

**SYNOPSIS**

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
struct batch_status *pbs_statserver(int connect, struct attrl *attrib,
char *extend)
```

```
void pbs_statfree(struct batch_status *psj)
```

**DESCRIPTION**

Issue a batch request to obtain the status of a batch server.

A Status Server batch request is generated and sent to the server over the connection specified by `connect` which is the return value of `pbs_connect()`.

The parameter, `attrib`, is a pointer to an `attrl` structure which is defined in `pbs_ifl.h` as:

```
struct attrl {
    struct attrl *next;
    char *name;
    char *resource;
    char *value;
};
```

The `attrib` list is terminated by the first entry where `next` is a null pointer. If `attrib` is given, then only the attributes in the list are returned by the server. Otherwise, all the attributes of the server are returned. When an `attrib` list is specified, the `name` member is a pointer to an attribute name as listed in `pbs_alterjob(3B)` and `pbs_submit(3B)`. The `resource` member is only used if the `name` member is `ATTR_1`, otherwise it should be a pointer to a null string. The `value` member should always be a pointer to a null string.

When `pbs_statserver` is used to get the attributes of an object, a single `attrl` data structure is returned for each parameterized attribute.

The parameter, `extend`, is reserved for implementation-defined extensions.

The return value is a pointer to a list of `batch_status` structures, which is defined in `pbs_ifl.h` as:

```
struct batch_status {
    struct batch_status *next;
    char *name;
    struct attrl *attribs;
    char *text;
}
```

It is up to the user to free the space when no longer needed, by calling `pbs_statfree()`.

**SEE ALSO**

`qstat(1B)` and `pbs_connect(3B)`

**DIAGNOSTICS**

When the batch request generated by `pbs_statsserver()` function has been completed successfully by a batch server, the routine will return a pointer to a `batch_status` structure. Otherwise, a null pointer is returned and the error code is set in `pbs_erno`.

**pbs\_submit**

submit a PBS batch job

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
char *pbs_submit(int connect, struct attrpl *attrib, char *script,
                char *destination, char *extend)
```

## DESCRIPTION

Issue a batch request to submit a new batch job.

A Queue Job batch request is generated and sent to the server over the connection specified by connect which is the return value of pbs\_connect(). The job will be submitted to the queue specified by destination .

The parameter, attrib, is a list of attrpl structures which is defined in pbs\_ifl.h as:

```
struct attrl {
    char *name;
    char *resource;
    char *value;
    struct attrl *next;
    enum batch_op op;
};
```

The attrib list is terminated by the first entry where next is a null pointer.

The name member points to a string which is the name of the attribute. The value member points to a string which is the value of the attribute. The attribute names are defined in pbs\_job\_attributes(7B).

If an attribute is not named in the attrib array, the default action will be taken. It will either be assigned the default value or will not be passed with the job. The action depends on the attribute. If attrib itself is a null pointer, then the default action will be taken for each attribute.

Associated with an attribute of type ATTR\_1 (the letter ell) is a resource name indicated by resource in the attrl structure. All other attribute types should have a pointer to a null string for resource .

The op member is forced to a value of SET by pbs\_submit().

The parameter, script, is the path name to the job script. If the path name is relative, it will be expanded to the processes current working directory. If script is a null pointer or the path name pointed to is specified as the null string, no script is passed with the job.

The destination parameter specifies the destination for the job. It is specified as:

[queue]

If destination is the null string or the queue is not specified, the destination will be the default queue at the connected server.

The parameter, `extend`, is reserved for implementation-defined extensions.

The return value is a character string which is the `job_identifier` assigned to the job by the server. The space for the `job_identifier` string is allocated by `pbs_submit()` and should be released via a call to `free()` by the user when no longer needed.

#### SEE ALSO

`qsub(1B)` and `pbs_connect(3B)`

#### DIAGNOSTICS

When the batch request generated by `pbs_submit()` function has been completed successfully by a batch server, the routine will return a pointer to a character string which is the job identifier of the submitted batch job. Otherwise, a null pointer is returned and the error code is set in `pbs_error`.

**pbs\_submit\_resv**

submit a PBS reservation

**SYNOPSIS**

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
char *pbs_submit_resv(int connect, struct attrpl *attrib, char *extend)
```

**DESCRIPTION**

Issue a batch request to submit a new reservation.

A Submit Reservation batch request is generated and sent to the server over the connection specified by connect which is the return value of pbs\_connect().

The parameter, attrib, is a list of attrpl structures which is defined in pbs\_ifl.h as:

```
struct attrl {
    char *name;
    char *resource;
    char *value;
    struct attrl *next;
    enum batch_op op;
};
```

The attrib list is terminated by the first entry where next is a null pointer.

The name member points to a string which is the name of the attribute.

The value member points to a string which is the value of the attribute. The attribute names are defined in pbs\_ifl.h.

If an attribute is not named in the attrib array, the default action will be taken. It will either be assigned the default value or will not be passed with the reservation. The action depends on the attribute. If attrib itself is a null pointer, then the default action will be taken for each attribute.

Associated with an attribute of type ATTR\_1 (the letter ell) is a resource name indicated by resource in the attrl structure. All other attribute types should have a pointer to a null string for resource.

The op member is forced to a value of SET by pbs\_submit\_resv().

The parameter, extend, is reserved for implementation-defined extensions.

The return value is a character string which is the reservation\_identifier assigned to the job by the server.

The space for the reservation\_identifier string is allocated by pbs\_submit\_resv() and should be released via a call to free() by the user when no longer needed.

**SEE ALSO**

pbs\_rsub(1B) and pbs\_connect(3B)

**DIAGNOSTICS**

When the batch request generated by pbs\_submit\_resv() function has been completed successfully by a batch server, the routine will return a pointer to a character string which is the job identifier of the submitted batch job. Otherwise, a null pointer is returned and the error code is set in pbs\_error.

**pbs\_terminate**

terminate a PBS batch server

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
int pbs_terminate(int connect, int manner, char *extend)
```

## DESCRIPTION

Issue a batch request to shut down a batch server. This request requires the privilege level usually reserved for batch operators and administrators.

A Server Shutdown batch request is generated and sent to the server over the connection specified by connect which is the return value of pbs\_connect().

The parameter, manner, specifies the manner in which the server is shut down. The available manners are defined in pbs\_ifl.h.

The server will not respond to the batch request until the server has completed its termination procedure.

The parameter, extend, is reserved for implementation-defined extensions.

This call requires PBS Operator or Manager privilege.

## SEE ALSO

qterm(8B) and pbs\_connect(3B)

## DIAGNOSTICS

When the batch request generated by pbs\_terminate() function has been completed successfully by a batch server, the routine will return 0 (zero). Otherwise, a non zero error is returned. The error number is also set in pbs\_erno.

# 5

# TM Library

This chapter describes the PBS Task Management library. The TM library is a set of routines used to manage multi-process, parallel, and distributed applications. The current version is an implementation of the proposed (draft) PSCHED standard sponsored by NASA. Altair has since submitted this draft to the DRAMA working group of the international Global Grid Forum standards body.

## 5.1 TM Library Routines

The following manual pages document the application programming interface provided by the TM library.

---

**tm\_init, tm\_nodeinfo, tm\_poll, tm\_notify, tm\_spawn, tm\_kill, tm\_obit, tm\_taskinfo, tm\_atnode, tm\_rescinfo, tm\_publish, tm\_subscribe, tm\_finalize, tm\_attach**

task management API

SYNOPSIS

```
#include <tm.h>
```

```
int tm_init(info, roots)
    void *info;
    struct tm_roots *roots;
```

```
int tm_nodeinfo(list, nnodes)
    tm_node_id **list;
    int *nnodes;
```

```
int tm_poll(poll_event, result_event, wait, tm_errno)
    tm_event_t poll_event;
    tm_event_t *result_event;
    int wait;
    int *tm_errno;
```

```
int tm_notify(tm_signal)
    int tm_signal;
```

```
int tm_spawn(argc, argv, envp, where, tid, event)
    int argc;
    char **argv;
    char **envp;
    tm_node_id where;
    tm_task_id *tid;
    tm_event_t *event;
```

```
int tm_kill(tid, sig, event)
    tm_task_id tid;
    int sig;
    tm_event_t *event;
```

```
int tm_obit(tid, obitval, event)
    tm_task_id tid;
    int *obitval;
    tm_event_t *event;
```

```
int tm_taskinfo(node, tid_list, list_size, ntasks, event)
    tm_node_id node;
    tm_task_id *tid_list;
    int list_size;
    int *ntasks;
    tm_event_t *event;
```

```
int tm_atnode(tid, node)
    tm_task_id tid;
    tm_node_id *node;
```



```

int tm_rescinfo(node, resource, len, event)
    tm_node_id node;
    char *resource;
    int len;
    tm_event_t *event;

int tm_publish(name, info, len, event)
    char *name;
    void *info;
    int len;
    tm_event_t *event;

int tm_subscribe(tid, name, info, len, info_len, event)
    tm_task_id tid;
    char *name;
    void *info;
    int len;
    int *info_len;
    tm_event_t *event;

int tm_attach(jobid, cookie, pid, tid, host, port)
    char *jobid;
    char *cookie;
    pid_t pid;
    tm_task_id *tid;
    char *host;
    int port;

int tm_finalize()

```

#### DESCRIPTION

These functions provide a partial implementation of the task management interface part of the PSCHED API. In PBS, MOM provides the task manager functions. This library opens a tcp socket to the MOM running on the local host and sends and receives messages using the DIS protocol (described in the PBS IDS). The tm interface can only be used by a process within a PBS job.

The PSCHED Task Management API description used to create this library was committed to paper on November 15, 1996 and was given the version number 0.1. Changes may have taken place since that time which are not reflected in this library.

The API description uses several data types that it purposefully does not define. This was done so an implementation would not be confined in the way it was written. For this specific work, the definitions follow:

```

typedef int      tm_node_id; /* job-relative node id */
#define TM_ERROR_NODE ((tm_node_id)-1)

typedef int      tm_event_t; /* > 0 for real events */
#define TM_NULL_EVENT ((tm_event_t)0)
#define TM_ERROR_EVENT ((tm_event_t)-1)

```

```
typedef unsigned long tm_task_id;
#define TM_NULL_TASK (tm_task_id)0
```

There are a number of error values defined as well: TM\_SUCCESS, TM\_ESYSTEM, TM\_ENOEVENT, TM\_ENOTCONNECTED, TM\_EUNKNOWNCMD, TM\_ENOTIMPLEMENTED, TM\_EBADENVIRONMENT, TM\_ENOTFOUND.

tm\_init() initializes the library by opening a socket to the MOM on the local host and sending a TM\_INIT message, then waiting for the reply. The info parameter has no use and is included to conform with the PSCHED document. The roots pointer will contain valid data after the function returns and has the following structure:

```
struct tm_roots {
    tm_task_id  tm_me;
    tm_task_id  tm_parent;
    int         tm_nnodes;
    int         tm_ntasks;
    int         tm_taskpoolid;
    tm_task_id  *tm_tasklist;
};
```

tm\_me            The task id of this calling task.

tm\_parent        The task id of the task which spawned this task or TM\_NULL\_TASK if the calling task is the initial task started by PBS.

tm\_nnodes        The number of nodes allocated to the job.

tm\_ntasks        This will always be 0 for PBS.

tm\_taskpoolid    PBS does not support task pools so this will always be -1.

tm\_tasklist     This will be NULL for PBS.

The tm\_ntasks, tm\_taskpoolid and tm\_tasklist fields are not filled with data specified by the PSCHED document. PBS does not support task pools and, at this time, does not return information about current running tasks from tm\_init. There is a separate call to get information for current running tasks called tm\_taskinfo which is described below. The return value from tm\_init is TM\_SUCCESS if the library initialization was successful, or an error is returned otherwise.

tm\_nodeinfo() places a pointer to a malloc'ed array of tm\_node\_id's in the pointer pointed at by list. The order of the tm\_node\_id's in list is the same as that specified to MOM in the "exec\_host" attribute. The int pointed to by nnodes contains the number of nodes allocated to the job. This is information that is returned during initialization and does not require communication with MOM. If tm\_init has not been called, TM\_ESYSTEM is returned, otherwise TM\_SUCCESS is returned.

`tm_poll()` is the function which will retrieve information about the task management system to locations specified when other routines request an action take place. The bookkeeping for this is done by generating an event for each action. When the task manager (MOM) sends a message that an action is complete, the event is reported by `tm_poll` and information is placed where the caller requested it. The argument `poll_event` is meant to be used to request a specific event. This implementation does not use it and it must be set to `TM_NULL_EVENT` or an error is returned. Upon return, the argument `result_event` will contain a valid event number or `TM_ERROR_EVENT` on error. If `wait` is zero and there are no events to report, `result_event` is set to `TM_NULL_EVENT`. If `wait` is non-zero and there are no events to report, the function will block waiting for an event. If no local error takes place, `TM_SUCCESS` is returned. If an error is reported by MOM for an event, then the argument `tm_errno` will be set to an error code.

`tm_notify()` is described in the PSCHED documentation, but is not implemented for PBS yet. It will return `TM_ENOTIMPLEMENTED`.

`tm_spawn()` sends a message to MOM to start a new task. The node id of the host to run the task is given by `where`. The parameters `argc`, `argv` and `envp` specify the program to run and its arguments and environment very much like `exec()`. The full path of the program executable must be given by `argv[0]` and the number of elements in the `argv` array is given by `argc`. The array `envp` is NULL terminated. The argument `event` points to a `tm_event_t` variable which is filled in with an event number. When this event is returned by `tm_poll`, the `tm_task_id` pointed to by `tid` will contain the task id of the newly created task.

`tm_kill()` sends a signal specified by `sig` to the task `tid` and puts an event number in the `tm_event_t` pointed to by `event`.

`tm_obit()` creates an event which will be reported when the task `tid` exits. The `int` pointed to by `obitval` will contain the exit value of the task when the event is reported.

`tm_taskinfo()` returns the list of tasks running on the node specified by `node`. The PSCHED documentation mentions a special ability to retrieve all tasks running in the job. This is not supported by PBS. The argument `tid_list` points to an array of `tm_task_id`'s which contains `list_size` elements. Upon return, `event` will contain an event number. When this event is polled, the `int` pointed to by `ntasks` will contain the number of tasks running on the node and the array will be filled in with `tm_task_id`'s. If `ntasks` is greater than `list_size`, only `list_size` tasks will be returned.

`tm_atnode()` will place the node id where the task `tid` exists in the `tm_node_id` pointed to by `node`.

`tm_rescinfo()` makes a request for a string specifying the resources available on a node given by the argument `node`. The string is returned in the buffer pointed to by `resource` and is terminated by a NUL character unless the number of characters of information is greater than specified by `len`. The resource string PBS returns is formatted as fol-

lows:

A space separated set of strings from the uname system call. The order of the strings is sysname, nodename, release, version, machine.

A comma separated set of strings giving the components of the "Resource\_List" attribute of the job, preceded by a colon (:). Each component has the resource name, an equal sign, and the limit value.

tm\_publish() causes len bytes of information pointed at by info to be sent to the local MOM to be saved under the name given by name.

tm\_subscribe() returns a copy of the information named by name for the task given by tid. The argument info points to a buffer of size len where the information will be returned. The argument info\_len will be set with the size of the published data. If this is larger than the supplied buffer, the data will have been truncated.

tm\_attach() commands MOM to create a new PBS "attached task" out of a session running on MOM's host. The jobid parameter specifies the job which is to have a new task attached. If it is NULL, the system will try to determine the correct jobid. The cookie parameter must be NULL. The pid parameter must be a non-zero process id for the process which is to be added to the job specified by jobid. If tid is non-NULL, it will be used to store the task id of the new task. The host and port parameters specify where to contact MOM. host should be NULL. The return value will be 0 if a new task has been successfully created and non-zero on error. The return value will be one of the TM error numbers defined in tm.h as follows:

TM_ESYSTEM	MOM cannot be contacted
TM_ENOTFOUND	No matching job was found
TM_ENOTIMPLEMENTED	The call is not implemented/supported
TM_ESESSION	The session specified is already attached
TM_EUSER	The calling user is not permitted to attach
TM_EOWNER	The process owner does not match the job
TM_ENOPROC	The process does not exist

tm\_finalize() may be called to free any memory in use by the library and close the connection to MOM.

#### SEE ALSO

pbs\_mom(8B), pbs\_sched(8B)

# 6

# RM Library

This chapter describes the PBS Resource Monitor library. The RM library contains functions to facilitate communication with the PBS Professional resource monitor. It is set up to make it easy to connect to several resource monitors and handle the network communication efficiently.

## 6.1 RM Library Routines

The following “manual” pages document the application programming interface provided by the RM library.

**openrm, closerm, downrm, configrm, addreq, allreq, getreq, flushreq, activereq, fullresp**

resource monitor API

## SYNOPSIS

```

#include <sys/types.h>
#include <netinet/in.h>
#include <rm.h>

int openrm (host, port)
    char *host;
    unsigned int port;

int closerm (stream)
    int stream;

int downrm (stream)
    int stream;

int configrm (stream, file)
    int stream;
    char *file;

int addreq (stream, line)
    int stream;
    char *line;

int allreq (line)
    char *line;

char *getreq(stream)
    int stream;

int flushreq()

int activereq()

void fullresp(flag)
    int flag;

```

## DESCRIPTION

The resource monitor library contains functions to facilitate communication with the PBS Professional resource monitor. It is set up to make it easy to connect to several resource monitors and handle the network communication efficiently.

In all these routines, the variable `pbs_erno` will be set when an error is indicated. The lower levels of network protocol are handled by the "Data Is Strings" DIS library and the "Reliable Packet Protocol" RPP library.

`configrm()` causes the resource monitor to read the file named. Deprecated.

---

`addreq()` begins a new message to the resource monitor if necessary. Then adds a line to the body of an outstanding command to the resource monitor.

`allreq()` begins, for each stream, a new message to the resource monitor if necessary. Then adds a line to the body of an outstanding command to the resource monitor.

`getreq()` finishes and sends any outstanding message to the resource monitor. If `fullresp()` has been called to turn off "full response" mode, the routine searches down the line to find the equal sign just before the response value. The returned string (if it is not NULL) has been allocated by `malloc` and thus `free` must be called when it is no longer needed to prevent memory leaks.

`flushreq()` finishes and sends any outstanding messages to all resource monitors. For each active resource monitor structure, it checks if any outstanding data is waiting to be sent. If there is, it is sent and the internal structure is marked to show "waiting for response".

`fullresp()` turns on, if `flag` is true, "full response" mode where `getreq()` returns a pointer to the beginning of a line of response. This is the default. If `flag` is false, the line returned by `getreq()` is just the answer following the equal sign.

`activereq()` Returns the stream number of the next stream with something to read or a negative number (the return from `rpp_poll`) if there is no stream to read.

In order to use any of the above with Windows, initialize the network library and link with `winsck2`. To do this, call `winsck_init()` before calling the function and link against the `ws2_32.lib` library.

#### SEE ALSO

`tcp(4P)`, `udp(4P)`





# TCL/tk Interface

The PBS Professional software includes a TCL/tk interface to PBS. Wrapped versions of many of the API calls are compiled into a special version of the TCL shell, called `pbs_tclsh`. (A special version of the tk window shell is also provided, called `pbs_wish`.) This chapter documents the TCL/tk interface to PBS.

The `pbs_tclapi` is a subset of the PBS external API wrapped in a TCL library. This functionality allows the creation of scripts that query the PBS system. Specifically, it permits the user to query the `pbs_server` about the state of PBS, jobs, queues, and nodes, and communicate with `pbs_mom` to get information about the status of running jobs, available resources on nodes, etc.

## 7.1 TCL/tk API Functions

A set of functions to communicate with the PBS server and resource monitor have been added to those normally available with Tcl. All these calls will set the Tcl variable `pbs_errno` to a value to indicate if an error occurred. In all cases, the value "0" means no error. If a call to a Resource Monitor function is made, any error value will come from the system supplied `errno` variable. If the function call communicates with the PBS server, any error value will come from the error number returned by the server. This is the same TCL interface used by the `pbs_tclsh` and `pbs_wish` commands.

Note that the `pbs_tclapi pbsresquery` command, which calls the C API `pbs_resquery`, is deprecated. Any attempt to use it will result in a `PBSE_NOSUPPORT` error being returned.

**pbs\_tclapi**

PBS TCL Application Programming Interface

**DESCRIPTION**

The `pbs_tclapi` is a subset of the PBS external API wrapped in a TCL library. This functionality allows the creation of scripts that query the PBS system. Specifically, it permits the user to query the `pbs_server` about the state of PBS, jobs, queues, and nodes, and communicate with `pbs_mom` to get information about the status of running jobs, available resources on nodes, etc.

**USAGE**

A set of functions to communicate with the PBS server and resource monitor have been added to those normally available with Tcl. All these calls will set the Tcl variable "pbs\_erno" to a value to indicate if an error occurred. In all cases, the value "0" means no error. If a call to a Resource Monitor function is made, any error value will come from the system supplied `errno` variable. If the function call communicates with the PBS Server, any error value will come from the error number returned by the server. This is the same TCL interface used by the `pbs_tclsh` and `pbs_wish` commands.

**openrm host ?port?**

Creates a connection to the PBS Resource Monitor on `host` using `port` as the port number or the standard port for the resource monitor if it is not given. A connection handle is returned. If the open is successful, this will be a non-negative integer. If not, an error occurred.

**closerm connection**

The parameter `connection` is a handle to a resource monitor which was previously returned from `openrm`. This connection is closed. Nothing is returned.

**downrm connection**

Sends a command to the connected resource monitor to shutdown. Nothing is returned.

**configrm connection filename**

Sends a command to the connected resource monitor to read the configuration file given by `filename`. If this is successful, a "0" is returned, otherwise, "-1" is returned.

**addreq connection request**

A resource request is sent to the connected resource monitor. If this is successful, a "0" is returned, otherwise, "-1" is returned.

**getreq connection**

One resource request response from the connected resource monitor is returned. If an error occurred or there are no more responses, an empty string is returned.

**allreq request**

A resource request is sent to all connected resource monitors. The number of streams acted upon is returned.

**flushreq**

All resource requests previously sent to all connected resource monitors are flushed out to the network. Nothing is returned.

**activereq**

The connection number of the next stream with something to read is returned. If there is nothing to read from any of the connections, a negative number is returned.

**fullresp flag**

Evaluates flag as a boolean value and sets the response mode used by getreq to full if flag evaluates to "true". The full return from a resource monitor includes the original request followed by an equal sign followed by the response. The default situation is only to return the response following the equal sign. If a script needs to "see" the entire line, this function may be used.

**pbsstatserv**

The server is sent a status request for information about the server itself. If the request succeeds, a list with three elements is returned, otherwise an empty string is returned. The first element is the server's name. The second is a list of attributes. The third is the "text" associated with the server (usually blank).

**pbsstatjob**

The server is sent a status request for information about the all jobs resident within the server. If the request succeeds, a list is returned, otherwise an empty string is returned. The list contains an entry for each job. Each element is a list with three elements. The first is the job's jobid. The second is a list of attributes. The attribute names which specify resources will have a name of the form "Resource\_List:name" where "name" is the resource name. The third is the "text" associated with the job (usually blank).

**pbsstatque**

The server is sent a status request for information about all queues resident within the server. If the request succeeds, a list is returned, otherwise an empty string is returned. The list contains an entry for each queue. Each element is a list with three elements. This first is the queue's name. The second is a list of attributes similar to pbsstatjob. The third is the "text" associated with the queue (usually blank).

**pbsstatnode**

The server is sent a status request for information about all nodes defined within the server. If the request succeeds, a list is returned, otherwise an empty string is returned. The list contains an entry for each node. Each element is a list with

three elements. This first is the node's name. The second is a list of attributes similar to `pbsstatjob`. The third is the "text" associated with the node (usually blank).

#### `pbssselstat`

The server is sent a status request for information about the all runnable jobs resident within the server. If the request succeeds, a list similar to `pbsstatjob` is returned, otherwise an empty string is returned.

#### `pbsrunjob jobid ?location?`

Run the job given by `jobid` at the location given by `location`. If `location` is not given, the default location is used. If this is successful, a "0" is returned, otherwise, "-1" is returned.

#### `pbsasyrunjob jobid ?location?`

Run the job given by `jobid` at the location given by `location` without waiting for a positive response that the job has actually started. If `location` is not given, the default location is used. If this is successful, a "0" is returned, otherwise, "-1" is returned.

#### `pbsrerunjob jobid`

Re-runs the job given by `jobid`. If this is successful, a "0" is returned, otherwise, "-1" is returned.

#### `pbsdeljob jobid`

Delete the job given by `jobid`. If this is successful, a "0" is returned, otherwise, "-1" is returned.

#### `pbsholdjob jobid`

Place a hold on the job given by `jobid`. If this is successful, a "0" is returned, otherwise, "-1" is returned.

#### `pbsmovejob jobid ?location?`

Move the job given by `jobid` to the location given by `location`. If `location` is not given, the default location is used. If this is successful, a "0" is returned, otherwise, "-1" is returned.

#### `pbsqenable queue`

Set the "enabled" attribute for the queue given by `queue` to true. If this is successful, a "0" is returned, otherwise, "-1" is returned.

#### `pbsqdisable queue`

Set the "enabled" attribute for the queue given by `queue` to false. If this is successful, a "0" is returned, otherwise, "-1" is returned.

#### `pbsqstart queue`

Set the "started" attribute for the queue given by `queue` to true. If this is successful, a "0" is returned, otherwise, "-1" is returned.

**pbsqstop queue**

Set the "started" attribute for the queue given by queue to false. If this is successful, a "0" is returned, otherwise, "-1" is returned.

**pbsalterjob jobid attribute\_list**

Alter the attributes for a job specified by jobid. The parameter attribute\_list is the list of attributes to be altered. There can be more than one. Each attribute consists of a list of three elements. The first is the name, the second the resource and the third is the new value. If the alter is successful, a "0" is returned, otherwise, "-1" is returned.

**pbsresquery resource\_list**

Deprecated. Obtain information about the resources specified by resource\_list. This will be a list of strings. If the request succeeds, a list with the same number of elements as resource\_list is returned. Each element in this list will be a list with four numbers. The numbers specify available, allocated, reserved, and down in that order.

**pbsconnect ?server?**

Make a connection to the named server or the default server if a parameter is not given. Only one connection to a server is allowed at any one time.

**pbsdisconnect**

Disconnect from the currently connected server.

The above Tcl functions use PBS interface library calls for communication with the server and the PBS resource monitor library to communicate with pbs\_mom.

**datetime ?day? ?time?**

The number of arguments used determine the type of date to be calculated. With no arguments, the current POSIX date is returned. This is an integer in seconds.

With one argument there are two possible formats. The first is a 12 (or more) character string specifying a complete date in the following format:

YYMMDDhhmmss

All characters must be digits. The year (YY) is given by the first two (or more) characters and is the number of years since 1900. The month (MM) is the number of the month [01-12]. The day (DD) is the day of the month [01-32]. The hour (hh) is the hour of the day [00-23]. The minute (mm) is minutes after the hour [00-59]. The second (ss) is seconds after the minute [00-59]. The POSIX date for the given date/time is returned.

The second option with one argument is a relative time. The format for this is

HH:MM:SS

With hours (HH), minutes (MM) and seconds (SS) being separated by

colons ":". The number returned in this case will be the number of seconds in the interval specified, not an absolute POSIX date.

With two arguments a relative date is calculated. The first argument specifies a day of the week and must be one of the following strings: "Sun", "Mon", "Tue", "Wed", "Thr", "Fri", or "Sat". The second argument is a relative time as given above. The POSIX date calculated will be the day of the week given which follows the current day, and the time given in the second argument. For example, if the current day was Monday, and the two arguments were "Fri" and "04:30:00", the date calculated would be the POSIX date for the Friday following the current Monday, at four-thirty in the morning. If the day specified and the current day are the same, the current day is used, not the day one week later.

#### strftime format time

This function calls the POSIX function `strftime()`. It requires two arguments. The first is a format string. The format conventions are the same as those for the POSIX function `strftime()`. The second argument is POSIX calendar time in second as returned by `datetime`. It returns a string based on the format given. This gives the ability to extract information about a time, or format it for printing.

#### logmsg tag message

This function calls the internal PBS function `log_err()`. It will cause a log message to be written to the scheduler's log file. The tag specifies a function name or other word used to identify the area where the message is generated. The message is the string to be logged.

#### SEE ALSO

`pbs_tclsh(8B)`, `pbs_wish(8B)`, `pbs_mom(8B)`, `pbs_server(8B)`, `pbs_sched(8B)`

# 8 Hooks

This chapter describes the PBS hook APIs. For more information on hooks, see the PBS Professional Administrator's Guide.

## 8.1 Introduction

A hook is a block of Python code that is triggered in response to queuing a job, modifying a job, moving a job, running a job, submitting a PBS reservation, MoM receiving a job, MoM starting a job, MoM killing a job, a job finishing, and MoM cleaning up a job. Each hook can *accept* (allow) or *reject* (prevent) the action that triggers it. The hook can modify the input parameters given for the action. The hook can also make calls to functions external to PBS. PBS provides an interface for use by hooks. This interface allows hooks to read and/or modify things such as job and server attributes, the server, queues, and the event that triggered the hook.

The Administrator creates any desired hooks.

This chapter contains the following man pages:

- `pbs_module(7B)`
- `pbs_stathook(3B)`

See the following additional man pages:

- `qmgr(1B)`
- `qsub(1B)`
- `qmove(1B)`
- `qalter(1B)`
- `pbs_rsub(1B)`
- `pbs_manager(3B)`

## 8.2 How Hooks Work

### 8.2.1 Hook Contents and Permissions

A hook contains a Python script. The script is evaluated by a Python 2.5 or later interpreter, embedded in PBS.

Hooks have a default Linux umask of 022. File permissions are inherited from the current working directory of the hook script.

### 8.2.2 Accepting and Rejecting Actions

The hook script always accepts the current event request action unless an unhandled exception occurs in the script, a hook alarm timeout is triggered or there's an explicit call to `pbs.event().reject()`.

### 8.2.3 Exceptions

A hook script can catch an exception and evaluate whether or not to accept or reject the event action. In this example, while referencing the non-existent attribute `pbs.event().job.interactive`, an exception is triggered, but the event action is still accepted:

```
...
try:
    e = pbs.event()
    if e.job.interactive:
        e.reject("Interactive jobs not allowed")
except SystemExit:
    pass
except:
    e.accept()
```

### 8.2.4 Unsupported Interfaces and Uses

Site hooks which read, write, close, or alter `stdin`, `stdout`, or `stderr`, are not supported. Hooks which use any interfaces other than those described are unsupported.

## 8.3 Interface to Hooks

Two PBS APIs are used with hooks. These are `pbs_manager()` and `pbs_stathook()`. The `pbs` module provides a Python interface to PBS.

### 8.3.1 The `pbs` Module

Hooks have access to a special module called “`pbs`”, which contains functions that perform PBS-related actions. This module must be explicitly loaded by the hook writer via the call “`import pbs`”.

The *pbs module* provides an interface to PBS and the hook environment. The interface is made up of Python objects, which have attributes and methods. You can operate on these objects using Python code.

#### 8.3.1.1 Description of `pbs` Module



## **pbs\_module**

The interface is made up of Python objects, which have attributes and methods. You can operate on these objects using Python code. For a description of each object, see the PBS Professional Administrator's Guide.

### **8.3.1.2 pbs Module Objects**

See ["The pbs Module" on page 72 in the PBS Professional Hooks Guide](#).

### **8.3.1.3 pbs Module Global Attribute Creation Methods**

See ["PBS Types and Their Methods" on page 133 in the PBS Professional Hooks Guide](#).

### **8.3.1.4 Attributes and Resources**

See ["Using Attributes and Resources in Hooks" on page 42 in the PBS Professional Hooks Guide](#).

### **8.3.1.5 Exceptions**

See ["Table of Exceptions" on page 40 in the PBS Professional Hooks Guide](#) and ["Hook Alarm Calls and Unhandled Exceptions" on page 41 in the PBS Professional Hooks Guide](#).

### **8.3.1.6 See Also**

The PBS Professional Administrator's Guide, `pbs_hook_attributes(7B)`, `pbs_resources(7B)`, `qmgr(1B)`

## **8.3.2 The pbs\_manager() API**

The `pbs_manager()` API is described in ["pbs\\_manager" on page 36](#).

The `pbs_manager()` API contains an `obj_name` called "hook" defined as `MGR_OBJ_HOOK`, for use with non-built-in hooks.

The `pbs_manager()` API contains an `obj_name` called "pbshook" defined as `MGR_OBJ_PBS_HOOK`, for use with built-in hooks.

To run, hooks require root privilege on Linux, and local Administrators privilege on Windows. Hooks run only on the server host.

The `pbs_manager()` API contains the following hook commands, which operate only on hook objects:

#### **MGR\_CMD\_IMPORT**

This command is used for loading the hook script contents into a hook.

#### **MGR\_CMD\_EXPORT**

This command is used for dumping to a file the contents of a hook script.

The parameters to `MGR_CMD_IMPORT` and `MGR_CMD_EXPORT` are specified via the `attrib` parameter of `pbs_manager()`.

For `MGR_CMD_IMPORT`, specify `attrib["name"]` as "content-type", "content-encoding", and "input-file" along with the corresponding "value" and an "op" of SET.

For `MGR_CMD_EXPORT`, specify `attrib["name"]` as "content-type", "content-encoding",

and “output-file” along with the corresponding “value” and an “op” of SET.

Functions `MGR_CMD_IMPORT`, `MGR_CMD_EXPORT`, and `MGR_OBJ_HOOK` are used only with hooks, and therefore require root privilege on the server host.

When `obj_name` is `MGR_OBJ_PBS_HOOK`, the only allowed options for command are `MGR_CMD_SET`, `MGR_CMD_UNSET`, `MGR_CMD_IMPORT`, and `MGR_CMD_EXPORT`.

If `MGR_CMD_IMPORT` or `MGR_CMD_EXPORT` is specified when `obj_name` is `MGR_OBJ_PBS_HOOK`, the attropl content-type must be “application/x-config”.

### 8.3.2.1 Troubleshooting

You can use `pbs_geterrmsg()` to determine the last error message received from the `pbs_manager()` call. For instance, with a `MGR_OBJ_PBS_HOOK` where command is either `MGR_CMD_IMPORT` or `MGR_CMD_EXPORT`, but attropl 'content-type' is not “application/x-config”, `pbs_geterrmsg()` returns:

```
"<content-type> must be application/x-config"
```

If an unrecognized hook configuration file suffix is given, whether for `MGR_OBJ_HOOK` or `MGR_OBJ_PBS_HOOK`, `pbs_geterrmsg()` returns:

```
"<input-file> contains an invalid suffix, should be one of: .json .py .txt .xml .ini"
```

If the hook configuration file failed to be precompiled by PBS, `pbs_geterrmsg()` show:s

```
"Failed to validate config file, hook '<hook_name>' config file not overwritten"
```

### 8.3.2.2 Examples of Using `pbs_manager()`

Example 8-1: The following:

```
# qmgr -c 'import hook hook1 application/x-python base64 hello.py.b64'
```

is programmatically equivalent to:

```
static struct attrop1 imp_attribs[] = {
    { "content-type",
      (char *)0,
      "application/x-python",
      SET,
      (struct attrop1 *)&imp_attribs[1]
    },
    { "content-encoding",
      (char *)0,
      "base64",
      SET,
      (struct attrop1 *)&imp_attribs[2]},
    { "input-file",
      (char *)0,
      "hello.py.b64",
      SET,
      (struct attrop1 *)0
    }
};
```

```
pbs_manager(con, MGR_CMD_IMPORT, MGR_OBJ_HOOK, "hook1", &imp_attribs[0], NULL);
```

Example 8-2: The following:

```
# qmgr -c 'export hook hook1 application/x-python default hello.py'
```

is programmatically equivalent to:

```
static struct attropl exp_attribs[] = {
    { "content-type",
      (char *)0,
      "application/x-python",
      SET,
      (struct attropl *)&exp_attribs[1]},
    { "content-encoding",
      (char *)0,
      "default",
      SET,
      (struct attropl *)&exp_attribs[2]},
    { "output-file",
      (char *)0,
      "hello.py",
      SET,
      (struct attropl *)0
    }
};
```

```
pbs_manager(con, MGR_CMD_EXPORT, MGR_OBJ_HOOK, "hook1", &exp_attribs[0], NULL);
```

Example 8-3: The following:

```
# qmgr -c 'import pbshook hook1 application/x-config default hello.json'
```

is programmatically equivalent to:

```
static struct attropl imp_attribs[] = {
    { "content-type",
      (char *)0,
      "application/x-config",
      SET,
      (struct attropl *)&imp_attribs[1]},
    { "content-encoding",
      (char *)0,
      "default",
      SET,
      (struct attropl *)&imp_attribs[2]},
    { "input-file",
      (char *)0,
      "hello.json",
      SET,
      (struct attropl *)0
    }
};
```

```
pbs_manager(con, MGR_CMD_IMPORT, MGR_OBJ_PBS_HOOK, "hook1", &imp_attribs[0], NULL);
```

Example 8-4: The following:

```
# qmgr -c 'export pbshook hook1 application/x-config default hello.json'
```

is programmatically equivalent to:

```
static struct attropl exp_attribs[] = {
    { "content-type",
      (char *)0,
      "application/x-config",
      SET,
      (struct attropl *)&exp_attribs[1]},
    { "content-encoding",
      (char *)0,
      "default",
      SET,
      (struct attropl *)&exp_attribs[2]},
    { "output-file",
      (char *)0,
      "hello.json",
      SET,
      (struct attropl *)0
    }
};
```

```
pbs_manager(con, MGR_CMD_EXPORT,
MGR_OBJ_PBS_HOOK, "hook1", &exp_attribs[0], NULL);
```

### 8.3.3 The `pbs_stathook()` API

The PBS API called “`pbs_stathook()`” is used to get attributes and values for site hooks and built-in hooks.

The prototype for `pbs_stathook()` is as follows:

```
struct batch_status *pbs_stathook(int connect, char *hook_name, struct attrl *attrib, char
    *extend)
```

To query status for site hooks:

The call to `pbs_stathook()` causes a `PBS_BATCH_StatusHook` request to be sent to the server. In reply, the PBS server returns a batch reply status of object type `MGR_OBJ_HOOK` listing the attributes and values that were requested relating to a particular hook or all hooks of type `HOOK_SITE`. Leave the extend value blank.

To query status for built-in hooks:

Pass `PBS_HOOK` as the extend value. The server returns a batch reply status of object type `MGR_OBJ_PBS_HOOK`.

#### 8.3.3.1 Example of Using `pbs_stathook()`

To list all site hooks using `qmgr`:

```
qmgr -c "list hook"
```

To list all site hooks using the `pbs_stathook()` API:

```
pbs_stathook()
```

The result is the same. For example, if there are two site hooks, `c3` and `c36`:

```
Hook c3
    type = site
    enabled = true
    event = queuejob, modifyjob
    user = pbsadmin
    alarm = 30
    order = 1
```

```
Hook c36
    type = site
    enabled = true
    event = resvsub
    user = pbsadmin
    alarm = 30
    order = 1
```

#### 8.3.3.2 Description of `pbs_stathook()` API

**pbs\_stathook(3B)**

obtain status information about PBS site hooks

## SYNOPSIS

```
#include <pbs_error.h>
#include <pbs_ifl.h>
```

```
struct batch_status *pbs_stathook(int connect, char *id, struct attrl *attrib, char *extend)
```

```
void pbs_statfree(struct batch_status *psj)
```

## DESCRIPTION

Issue a batch request to obtain the status of a specified site hook or a set of site hooks at the current server.

A Status Hook batch request is generated and sent to the server over the connection specified by `connect` which is the return value of `pbs_connect()`.

This API can be executed only by root on the local server host.

The parameter, `id`, may be either a hook name or the null string. If `id` specifies a name, the attribute-value list for that hook is returned. If `id` is a null string or a null pointer, the status of all hooks at the current server is returned.

The parameter, `attrib`, is a pointer to an `attrl` structure which is defined in `pbs_ifl.h` as:

```
struct attrl {
    struct attrl *next;
    char *name;
    char *resource;
    char *value;
};
```

The `attrib` list is terminated by the first entry where `next` is a null pointer.

If an `attrib` list is given, then only the attributes in the list are returned by the server. Otherwise, all the attributes of a hook are returned.

The resource member is only used if the name member is `ATTR_1`, otherwise it should be a pointer to a null string.

The value member should always be a pointer to a null string.

The parameter, `extend`, is reserved for implementation-defined extensions.

The return value is a pointer to a list of `batch_status` structures or the null pointer if no site hooks can be queried for status. The `batch_status` structure is defined in `pbs_ifl.h` as

```
struct batch_status {
    struct batch_status *next;
    char *name;
    struct attrl *attribs;
    char *text;
}
```

It is up to the user to free the structure when no longer needed, by calling `pbs_statfree()`.

#### SEE ALSO

`pbs_hook_attributes(7B)`, `pbs_connect(3B)`

#### DIAGNOSTICS

When the batch request generated by the `pbs_stathook()` function has been completed successfully and the status of each site hook has been returned by the batch server, the routine will return a pointer to the list of `batch_status` structures. If no site hooks were available to query or an error occurred, a null pointer is returned. The global integer `pbs_errno` should be examined to determine the cause.

### 8.3.4 Error Messages

The following error message is returned by the `pbs_geterrmsg()` API after calling `pbs_manager()` operating on a hook object, with the `MGR_CMD_IMPORT` command, with “content-type” of “application/x-config”:

```
"Failed to validate config file, hook 'submit' config file not overwritten"
```

If the input config file given is of unrecognized suffix, then the following message is returned by the `pbs_geterrmsg()` API after calling `pbs_manager()` operating on a hook object, `MGR_CMD_IMPORT` command with “content-type” of “application/x-config”:

```
"<input-file> contains an invalid suffix, should be one of: .json .py .txt .xml .ini"
```

If you specify an unknown hook event, `pbs_geterrmsg()` returns the following after calling `pbs_manager()`:

```
invalid argument (<bad_event>) to event. Should be one or more of:
  queuejob,modifyjob,resvsub,movejob,runjob,provision,execjob_begin,execjob_prologue,execjob_e
  pilogue,execjob_preterm,execjob_end,exechost_periodic,execjob_launch,exechost_startup or ""
  for no event
```

If you specify an invalid value for a hook’s debug attribute, the following error message appears in `qmgr`’s `STDERR` and is returned by `pbs_geterrmsg()` after calling `pbs_manager()`:

```
"unexpected value '<bad_val>' must be (not case sensitive) true|t|y|1|false|f|n|0"
```

A `runjob` hook cannot set the value of a `Resource_List` member other than those listed in ["Table: Reading & Setting Built-in Job Resources in Hooks" on page 56 in the PBS Professional Hooks Guide](#). Setting any of the wrong resources results in the following:

- The hook request is rejected
- The following message is the output from calling `pbs_geterrmsg()` after the failed `pbs_runjob()`:  

```
" request rejected by filter hook: '<hook name>' hook failed to set job's
  Resource_List.<resc_name> = <resc_value> (not allowed)"
```



# Index

## A

activereq [PG-76](#)  
addreq [PG-76](#)  
allreq [PG-76](#)

## C

client commands [PG-7](#)  
closerm [PG-76](#)  
commands [PG-7](#)  
configrm [PG-76](#)  
credential [PG-25](#)

## D

downrm [PG-76](#)

## E

executor [PG-6](#)

## F

Files  
  .rhosts [PG-7](#)  
  hosts.equiv [PG-6](#), [PG-7](#)  
flushreq [PG-76](#)  
fullresp [PG-76](#)

## G

getreq [PG-76](#)

## H

hosts.equiv [PG-6](#)

## J

Job  
  Executor (MOM) [PG-6](#)  
  Scheduler [PG-6](#)

## M

manager  
  commands [PG-7](#)  
MOM [PG-5](#), [PG-6](#)

## O

openrm [PG-76](#)

operator

  commands [PG-7](#)

## P

pbs\_alterjob [PG-27](#)  
pbs\_asyruntime [PG-45](#)  
pbs\_connect [PG-28](#)  
pbs\_default [PG-29](#)  
pbs\_deljob [PG-30](#)  
pbs\_delresv [PG-31](#)  
pbs\_disconnect [PG-32](#)  
pbs\_geterrmsg [PG-33](#)  
pbs\_holdjob [PG-34](#)  
pbs\_locjob [PG-35](#)  
pbs\_manager [PG-36](#)  
pbs\_module [PG-87](#)  
pbs\_mom [PG-5](#), [PG-6](#)  
pbs\_movejob [PG-39](#)  
pbs\_msgjob [PG-40](#)  
pbs\_orderjob [PG-41](#)  
pbs\_rerunjob [PG-43](#)  
pbs\_rlsjob [PG-44](#)  
pbs\_rshd [PG-6](#)  
pbs\_runjob [PG-45](#)  
pbs\_sched [PG-4](#), [PG-5](#), [PG-6](#)  
pbs\_selectjob [PG-46](#)  
pbs\_selstat [PG-48](#)  
pbs\_server [PG-4](#), [PG-5](#)  
pbs\_sigjob [PG-50](#)  
pbs\_statfree [PG-51](#)  
pbs\_stathook(3B) [PG-93](#)  
pbs\_stathost [PG-54](#)  
pbs\_statjob [PG-52](#)  
pbs\_statnode [PG-54](#)  
pbs\_statque [PG-56](#)  
pbs\_statresv [PG-58](#)  
pbs\_statsched [PG-62](#)  
pbs\_statsserver [PG-63](#)  
pbs\_statvnode [PG-54](#)  
pbs\_submit [PG-65](#)  
pbs\_submit\_resv [PG-67](#)  
pbs\_tclapi [PG-80](#)  
pbs\_tclsh [PG-79](#)  
pbs\_terminate [PG-68](#)  
pbs\_wish [PG-79](#)  
POSIX [PG-7](#)

## Index

---

### S

Scheduler [PG-5](#), [PG-6](#)

Server [PG-5](#)

system daemons [PG-3](#)

### T

TCL [PG-79](#)

tm\_atnode [PG-70](#)

tm\_attach [PG-70](#)

tm\_finalize [PG-70](#)

tm\_init [PG-70](#)

tm\_kill [PG-70](#)

tm\_nodeinfo [PG-70](#)

tm\_notify [PG-70](#)

tm\_obit [PG-70](#)

tm\_poll [PG-70](#)

tm\_publish [PG-70](#)

tm\_rescinfo [PG-70](#)

tm\_spawn [PG-70](#)

tm\_subscribe [PG-70](#)

tm\_taskinfo [PG-70](#)

### U

user

    commands [PG-3](#), [PG-7](#)

User Guide [PG-x](#)



